

SWITCH: Benchmarking Modeling and Handling of Tangible Interfaces in Long-horizon Embodied Scenarios

Juntao Cheng^{1,2*†}, Wanyue Zhang^{1,3,4*†}, Zhiwei Yu^{1 ‡§},
Shuo Ren⁴, Zheqi He¹, Shaoxuan Xie¹, Guocai Yao¹,
Jieru Lin^{6†}, Börje F. Karlsson^{1‡}, Jiajun Zhang^{3,4,5}

¹Beijing Academy of Artificial Intelligence (BAAI) ²Shanghai Jiao Tong University

³School of Artificial Intelligence, University of Chinese Academy of Sciences

⁴Institute of Automation, Chinese Academy of Sciences

⁵Wuhan AI Research ⁶Harbin Institute of Technology

Abstract

Tangible control interfaces (TCIs), such as appliance panels, remotes, elevators, and embedded GUIs, are a fundamental component of everyday human-built environments. Interacting with these interfaces requires agents not only to ground language in visual observations, but also to execute actions, track temporally evolving state changes, and verify whether intended outcomes have been achieved. However, existing benchmarks predominantly evaluate open-loop perception or single-step action execution, failing to capture this continuous cycle of interaction, feedback, and correction. We introduce **SWITCH**, an **offline diagnostic benchmark** for closed-loop interactive reasoning over recorded real-world TCI trajectories¹. Here, “closed-loop” describes reasoning across observed states, candidate actions, action-conditioned transitions, outcome verification, and recovery; models do not execute actions or receive feedback online. **SWITCH** comprises 1,170 temporally interactive videos across diverse functional categories, providing structured annotations of instructions, actions, state transitions, outcomes, and recovery behaviors over time. SWITCH evaluates these capabilities through three complementary settings: Multiple-Choice QA, OpenQA, and Interactive Video Generation. The generation setting probes interaction-centered world modeling using both VLM-as-Judge and human evaluation². Experiments with frontier proprietary and open-source multimodal models reveal persistent weaknesses in fine-grained visual-temporal perception, outcome verification, and error recovery, highlighting SWITCH

as a testbed for closed-loop embodied intelligence.

1 Introduction

Intelligent behaviour in physical world requires not only perception and reasoning, but also effective interaction with the existing real world and the infrastructure embedded within it. In everyday human environments, this interaction is mediated largely through **tangible control interfaces (TCIs)**, including switches, appliance panels, elevators, and embedded GUIs. These interfaces form the primary bridge between human intentions and physical state changes in the environment. Agents must ground instructions in situated visual observations, infer interface affordances and device states, predict how actions will alter the environment, track temporally evolving state changes, and verify whether intended outcomes have actually been achieved. Unlike static perception tasks or open-loop action prediction, interaction with TCIs is inherently **closed-loop**: actions modify the world, observations evolve over time, and failures may require recovery or re-planning. Moreover, TCI interactions often involve delayed or spatially displaced effects—*e.g.*, preheating an oven, changing environmental controls, or activating a device outside the current field of view—requiring models to reason beyond immediate visual feedback.

Despite substantial progress in computer vision, large multimodal models (LMMs), and embodied agents, existing benchmarks (*e.g.*, (Foss et al., 2025; Chen et al., 2025; Chow et al., 2025)) only partially capture these challenges. An agent may select a plausible action but suffer from *visual-semantic misalignment*: failing to recognize that the action did not achieve the goal, missing subtle visual state changes, or *hallucinating task success* without recovering from an incomplete execution. This gap limits our ability to measure whether multimodal models can perform interactive reasoning

*Equal contributors.

†Work done during the internship at Beijing Academy of Artificial Intelligence (BAAI).

‡Correspondence authors: <zwyu, borje>@baai.ac.cn

§Project lead.

¹Benchmark resources: <https://huggingface.co/datasets/BAAI-Agents/SWITCH>

²Leaderboard website: <https://huggingface.co/spaces/BAAI-Agents/SWITCH-Leaderboard>

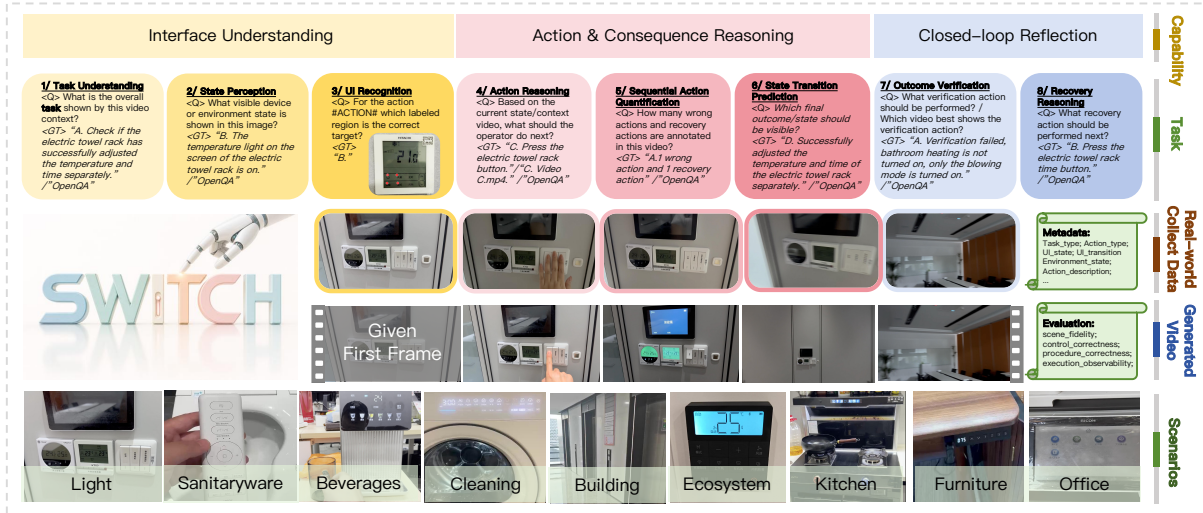


Figure 1: **Overview of the SWITCH benchmark.** The framework structures TCI interaction into **8 tasks** across **three core capabilities**: *Interface Understanding*, *Action & Consequence Reasoning*, and *Closed-loop Reflection*. We illustrate the pipeline using the example task “Turn off all the lights” and detail the progression from **Real-world Collected Data** to **Generated Video** evaluation. SWITCH covers 9 diverse domains spanning daily life and work environments (see Table 11 in the Appendices for details).

rather than isolated perception or prediction.

We introduce **SWITCH** (Semantic World Interface Tasks for Control & Handling), a benchmark for evaluating interaction-centric capabilities and causality in the physical world. SWITCH formulates interface use as an interactive reasoning cycle consisting of: (i) understanding instructions and interfaces, (ii) predicting next actions, (iii) tracking state transitions, (iv) verifying outcomes from visual feedback, and (v) recovering from failure through re-planning. *This framing turns physical interaction into a multimodal reasoning problem centered on action consequences and feedback.*

Importantly, SWITCH is an offline diagnostic benchmark rather than an online robot-control environment. We use “closed-loop” to describe the reasoning structure preserved in recorded trajectories: a model must interpret the current state, select or predict an action, reason about the resulting transition, verify the outcome, and recover from failure. This controlled setting isolates these competencies and provides an intermediate step toward online embodied agents, where actuation, latency, and safety introduce additional challenges.

SWITCH is built from 1,170 real-world egocentric interaction videos spanning nine major categories of everyday TCIs. It provides language-grounded temporal annotations of fine-grained actions, state transitions, task outcomes, and recovery behaviors. Based on these annotations,

SWITCH supports three complementary formats: (1) Multiple-Choice QA (MCQ) for scalable automatic evaluation, (2) OpenQA for free-form reasoning and outcome verification, and (3) Interactive Video Generation for evaluating generative world modeling and interaction dynamics prediction. Because all three formats are grounded in the same annotated interaction loops, SWITCH goes beyond static visual question answering by requiring temporally linked evidence about controls, transitions, outcomes, and recovery. Figure 1 illustrates the overall benchmark design.

Our contributions are threefold. First, we introduce **an offline diagnostic benchmark of TCI-centered closed-loop reasoning grounded in real-world trajectories**, targeting a practical but under-explored setting for multimodal agents. Second, we provide **a unified evaluation protocol** spanning multiple-choice QA, open-ended rubric-based judging, temporal action reasoning, recovery reasoning, and generative video evaluation. Third, we **systematically evaluate frontier multimodal models**, revealing persistent weaknesses in fine-grained visual-temporal perception, outcome verification, and failure recovery, thereby charting a clear path for future research in aligning LMMs with dynamic physical environments. Source code, datasets, and model inference results will be released publicly.

2 Related Work

Evaluating multimodal agents in realistic interactive environments remains challenging. Existing work mainly falls into two lines: physical/world-model evaluation and interface-control evaluation. Benchmarks such as PhysBench, DeepPHY, World-Prediction, WorldBench, World-in-World, QuantiPhy, and BEHAVIOR-1K assess physical understanding, dynamics prediction, or closed-loop planning (Chow et al., 2025; Xu et al., 2026b; Upadhyay et al., 2026; Zhang et al., 2025a; Puyin et al., 2025; Li et al., 2023). While valuable, they focus primarily on scenes, objects, and world dynamics rather than the semantic understanding of tangible control interfaces and the verification of action outcomes.

A second line studies agents that operate web, desktop, or mobile interfaces, including Mind2Web, WebArena, AndroidWorld, Mobile-Bench, OSWorld, ScreenSpot-Pro, and UINavBench (Deng et al., 2023; Zhou et al., 2024; Rawles et al., 2024; Deng et al., 2024; Xu et al., 2026a; Xie et al., 2024; Li et al., 2025a; Tan et al., 2025; Agrawal et al., 2025). More recent environment-coupled benchmarks such as HomeBench and SimuHome begin to consider device-state reasoning (Li et al., 2025b; Seo et al., 2026), but they still largely rely on simulated or API-level interaction. In contrast, SWITCH focuses on tangible control interfaces that couple UI semantics with physical device states. SWITCH evaluates whether a model can interpret a real control panel, choose an action, predict the resulting state transition, and verify that the intended physical outcome has been achieved.

3 Semantic World Interface Tasks

SWITCH casts TCI use as interactive reasoning. While existing benchmarks (e.g., PhysToolBench (Zhang et al., 2025b)) ask if a model can predict an action, SWITCH asks if it can tell whether the action has actually succeeded. Unlike in passive or open-loop settings, it links instructions to actions, consequences, and recovery. This is challenging due to hidden control logic, delayed effects, and subtle visual feedback.

To evaluate this closed-loop cycle, SWITCH introduces three progressive stages: (1) *Interface Understanding* (grounding states and controls), (2) *Action and Consequence Reasoning* (tracking actions and predicting temporal effects), and (3) *Closed-*

loop Reflection (verifying outcomes, detecting failures, and re-planning). This framing transforms isolated perception into a structured test of embodied interaction.

Questions are derived from real-world egocentric videos with dense, language-grounded annotations. Tasks span multiple-choice and open-ended formats using rubric-based LLM judging. Section 3.1 details the design principles, and Section 3.2 describes data curation.

3.1 Benchmark Design

SWITCH is designed to evaluate whether multimodal models can move from *perceiving* an interface to *acting* on it, and ultimately to *checking whether the action worked*. This emphasis is critical because robust perception alone does not guarantee reliable interaction: a model may correctly read text on a panel or localize a button, yet fail to notice that the device did not enter the desired state. We therefore organize the benchmark around the three-stage closed-loop structure introduced above.

Interface Understanding covers the perceptual and semantic grounding required before interaction. It includes task-aware visual question answering, where models answer goal-conditioned queries about device states, and semantic UI grounding, where they identify relevant controls and their functional roles. The objective is not generic object recognition, but grounding natural language instructions in actionable interface elements.

Action and Consequence Reasoning assesses whether models can progress from the current state to the next operation and anticipate its effects. This includes action reasoning, which infers target controls, interaction modes, and fine-grained steps, and state-transition prediction, which anticipates changes in the interface, the environment, or both. This stage tests whether models understand TCI operations as causal events rather than isolated visual changes.

Closed-loop Reflection evaluates whether an interaction actually succeeded. Spanning result verification, failure detection, and recovery reasoning, this stage requires models to identify visual evidence for task completion, recognize incorrect or incomplete outcomes, and select corrective actions. This phase is the cornerstone of SWITCH: passive perception is insufficient if a model cannot use environmental feedback to verify and course-correct.

3.2 Data Curation

SWITCH is curated through four progressive stages: real-world video collection, temporal interaction annotation, task construction, and quality-controlled splitting. The overarching goal is to preserve the complete closed-loop structure of TCI use: a user starts from a language goal, interacts with a device, observes state changes, verifies the outcome, and optionally recovers from failed or incomplete executions.

Video Collection. All videos in SWITCH were newly collected by our team specifically for this benchmark; no interaction videos were sourced from existing public datasets. The collection comprises 1,170 real-world egocentric interaction trajectories spanning nine domains and a wide range of device variants. Rather than recording isolated button presses, we collected complete, task-oriented interaction segments that include, when applicable, preparation, direct manipulation, waiting, visual inspection, outcome verification, and recovery from failed or incomplete execution. This collection protocol preserves the temporal evidence required for action reasoning, state-transition prediction, outcome verification, and recovery reasoning.

Temporal Annotation. Each video is densely annotated as a sequence of interaction events linking states, actions, and outcomes. For states, annotators describe both interface-level evidence (*e.g.*, indicator lights, display text, selected modes) and environment-level evidence (*e.g.*, lighting changes, water flow, temperature shifts). For actions, we explicitly distinguish *task-execution actions* (*e.g.*, pressing, rotating, swiping) from *verification actions* (*e.g.*, explicitly checking system status). Crucially, we also annotate failure and recovery behaviors when an execution is incorrect, incomplete, or requires corrective follow-up.

Task Construction. From these annotations, we derive evaluation tasks perfectly aligned with our three-stage framework. *Interface Understanding* evaluates task and state comprehension alongside semantic UI grounding. *Action and Consequence Reasoning* tests action reasoning, sequential action quantification, and state-transition prediction. *Closed-loop Reflection* rigorously evaluates outcome verification and recovery reasoning. The benchmark supports three parallel evaluation formats: multiple-choice questions (MCQs), open-

ended VideoQA, and generative world-model tasks. MCQs provide scalable option-based evaluation, OpenQA evaluates free-form responses using reference answers and strict rubrics, and generative world-model tasks map an initial observation and a language action to the expected post-action video, assessing scene fidelity, control correctness, procedural correctness, and outcome observability.

Distractor and Hard-Negative Generation. To ensure robust evaluation, distractors for MCQs are carefully generated to be visually and semantically plausible rather than random. We employ source-aware and similarity-based sampling to construct hard negatives from related devices, actions, or states. In addition, we introduce Seedance-based generative distractors to synthesize fine-grained hard-negative image and video options, further increasing the diversity and difficulty of the candidate set. We stringently filter items that can be answered via language priors or spurious correlations, forcing models to genuinely rely on visual-temporal evidence rather than superficial answer-option cues.

Quality Control and Strategic Splitting. Across all construction stages, our pipeline initially yielded more than 27,000 candidate QA pairs and generative items. To guarantee an exceptionally high evaluation standard, every retained annotation and constructed question was manually inspected and reviewed, in addition to automatic validation. We removed ambiguous questions, broken media links, near-duplicates, inconsistent annotations, and items answerable without visual evidence. This stringent filtering curates a highly refined final benchmark of 8,797 visually grounded instances. Rather than competing purely on scale, SWITCH distinguishes itself through **high interaction density**—each instance is deeply embedded in a multi-stage, temporally grounded, verification-aware closed loop. To prevent data leakage, we split the benchmark strictly by source video. Finally, to focus on true reasoning bottlenecks, we derive a diagnostic subset by isolating items with near-saturated performance under a representative baseline (Qwen2.5-VL-7B-Instruct). This subset enforces the benchmark’s core philosophy: to test whether a model can genuinely comprehend the implication of an outcome, rather than merely observing a visual state change without understanding underlying task success.

Model	Interface Understanding			Action & Consequence Reasoning			Closed-loop Reflection		Overall
	Task Under.	State Perc.	UI Recog.	Action Reas.	Seq. Quant.	State Trans.	Outcome Verif.	Recovery Reas.	
Proprietary / API Models									
Gemini 3.1 Pro	50.00	55.04	<u>64.07</u>	46.61	11.78	41.67	29.17	35.59	36.27
Claude 4.7 Opus	53.57	<u>42.86</u>	54.42	37.10	26.43	34.72	20.14	18.64	<u>31.27</u>
Doubao-Seed 2.0 Pro	<u>52.29</u>	36.06	60.07	35.80	28.12	<u>38.50</u>	<u>23.48</u>	23.98	29.44
GPT-5.5	50.00	30.67	65.21	<u>37.56</u>	21.02	29.17	14.93	22.88	27.33
Grok 4.3	35.71	25.63	53.05	<u>33.71</u>	25.16	33.33	13.89	15.25	25.40
MIMI-V2.5	28.57	8.82	56.36	27.60	21.02	34.72	7.29	20.34	19.13
GLM-5V Turbo	35.71	30.25	40.91	31.67	21.97	25.00	15.97	<u>24.58</u>	25.60
Open-Weight Models									
Qwen3-VL-235B	21.43	23.53	51.70	23.76	19.75	26.39	7.64	16.10	19.27
Llama-4-Maverick	28.57	18.49	28.62	30.54	13.06	25.00	13.19	16.95	20.27
MiniMax-VL-01-Fast	25.00	26.47	35.13	28.05	17.20	34.72	12.50	<u>24.58</u>	22.53
Mistral-Large-2512	21.43	21.85	23.83	26.92	<u>27.71</u>	25.00	9.72	16.10	21.93

Table 1: Accuracy (%) of leading multimodal models on the strong-baseline-filtered hard subset of SWITCH. Items correctly answered by Qwen2.5-VL-7B-Instruct are removed. Results are organized by three closed-loop interaction capabilities and eight fine-grained skills. The best and second-best performing models in each metric are **bolded** and underlined, respectively.

4 Experiments

We evaluate SWITCH under three complementary settings: Multiple-Choice QA, OpenQA, and Interactive Video Generation. The first two share a common task formulation and multimodal context, and jointly assess closed-loop interactive reasoning under answer selection and free-form generation. The third probes generative world modeling by testing whether models can continue egocentric device-interaction trajectories while preserving control semantics, procedural structure, and verifiable outcomes. Consequently, the benchmark’s conclusions do not depend solely on video generation or on a single automated judge. Together, these settings provide a unified view of the capabilities required for TCI-centered closed-loop reasoning.

4.1 Benchmarking Closed-Loop Interactive Reasoning with MCQ and OpenQA

We begin with MCQ and OpenQA, focusing on three questions: (i) how well current models solve the strong-baseline-filtered multiple-choice benchmark, (ii) which interaction skills remain the most difficult, and (iii) whether open-ended evaluation exposes failures beyond option selection.

4.1.1 Experimental Setup

Models. We benchmark a comprehensive suite of frontier multimodal models, stratified into two regimes. The proprietary/API group includes Gemini 3.1 Pro (Google DeepMind, 2026), Claude 4.7

Opus, Doubao-Seed 2.0 Pro (Team Seedance et al., 2026), GPT-5.5, Grok 4.3, MIMO-V2.5, and GLM-5V Turbo. The open-weight group features Qwen3-VL-235B, Llama-4-Maverick, MiniMax-VL-01-Fast, and Mistral-Large-2512. This selection spans a diverse spectrum of parameter scales and architectural strengths across image understanding, temporal video reasoning, and instruction following.

Multiple-Choice Evaluation. For MCQ tasks, models receive the language query alongside the corresponding egocentric visual context. Notably, to rigorously evaluate **joint state reasoning**—where real-world actions trigger simultaneous physical environment and UI changes—our benchmark incorporates both standard single-choice and complex multi-select questions. For multi-select items, models must identify all applicable visual state changes, evaluated under a strict Exact Match (EM) metric without partial credit. This strict criterion reflects the reality that incomplete state perception inevitably leads to incorrect verification or recovery decisions in real-world interactive systems. Unless otherwise specified, our primary MCQ analysis is conducted on the diagnostic subset (introduced in Section 3.2). This targeted evaluation ensures that models are tested against true interactive reasoning bottlenecks, effectively mitigating the influence of language priors and superficial answer-option correlations.

Open-Ended Evaluation (OpenQA). Unlike MCQs, OpenQA requires models to generate free-form responses, testing whether they can articulate underlying states, actions, or verification logic without relying on candidate options. To ensure rigorous and reproducible scoring, we employ a **Diagnostic LLM-as-a-Judge protocol**. Rather than loose semantic matching, our judge enforces strict binary grading based on predefined rubrics. Specifically, it penalizes hallucinated visual details and requires *minimal sufficient specificity* (e.g., distinguishing "red" vs. "green" buttons) and *temporal consistency*. Model refusals, formatting failures, and responses that exhibit severe ambiguity are strictly classified as incorrect. The detailed type-specific grading criteria and required judge output schema are provided in Appendix A.3, including Table 5 and Table 6.

Metrics. For both MCQ and OpenQA tasks, the primary evaluation metric is strict Accuracy (%). For a highly granular failure analysis, our diagnostic judge also yields categorized error tracking (e.g., missing objects, wrong temporal order, or failed outcome implication), which we dissect in Appendix A.8. Table 1 reports the main multiple-choice results on the strong-baseline-filtered subset, where each model is evaluated across the eight fine-grained skills defined by our closed-loop interaction framework. To complement this option-based evaluation, Table 2 presents the corresponding no-options OpenQA results, which test whether models can generate the required state, action, verification, or recovery information without relying on answer choices.

4.1.2 Capability Bottlenecks in Closed-Loop Reasoning

Tables 1 and 2 summarize model performance under multiple-choice and open-ended evaluations. Beyond aggregate accuracy, the skill-level breakdown reveals systematic bottlenecks in TCI-centered closed-loop interaction. Across models, failures are driven less by an inability to recognize interface elements than by difficulty connecting actions, state changes, and task completion.

1/ Closed-loop reasoning remains challenging. On the strong-baseline-filtered diagnostic MCQ subset, Gemini 3.1 Pro achieves the highest overall accuracy of 36.27%, while MiniMax-VL-01-Fast is the strongest open-weight model at 22.53%. Because this subset is constructed by removing items

correctly answered by Qwen2.5-VL-7B-Instruct, these results characterize a model-conditioned diagnostic set rather than the full benchmark distribution. Nevertheless, the low absolute accuracies show that many of the remaining examples are not reliably solved by current models and involve joint reasoning over visual evidence, temporal context, action consequences, and task outcomes.

2/ UI recognition consistently outpaces state perception. UI Recognition exceeds State Perception for every evaluated model, although the magnitude of the gap varies. GPT-5.5 achieves 65.21% on UI Recognition but only 30.67% on State Perception, a 34.54-point gap. Gemini 3.1 Pro obtains the strongest State Perception score at 55.04%, but this still trails its 64.07% UI Recognition accuracy. These results suggest that identifying the relevant control or interface region does not necessarily imply an accurate understanding of the device or environmental state, particularly when the evidence depends on selected modes, numeric values, indicator lights, or subtle physical feedback.

3/ Temporal action tracking remains brittle. Sequential Action Quantification remains difficult in both evaluation formats: the highest MCQ score is 28.12%, while the highest OpenQA score is 36.7%. Because the two settings use different item compositions and scoring protocols, their absolute values are not directly comparable. Nevertheless, both results reveal substantial difficulty in distinguishing and counting task-execution, erroneous, recovery, and verification-related actions over time, indicating that current models do not yet robustly preserve the event-level temporal structure of an interaction.

4/ Verification and recovery remain major bottlenecks. The highest MCQ accuracies for Outcome Verification and Recovery Reasoning are 29.17% and 35.59%, respectively. In OpenQA, the best scores for the two skills are only 9.9% and 9.1%. These results show that current models often fail to connect an observed action with its visible consequence, determine whether the intended goal has been achieved, and identify an appropriate corrective action when execution is incomplete or unsuccessful.

5/ OpenQA exposes failure modes beyond option selection. The best overall MCQ accuracy is 36.27%, whereas the best OpenQA accuracy on the 1,000-item no-options subset is 18.9%. GPT-5.5

Model	Interface Understanding		Action & Consequence Reasoning			Closed-loop Reflection		Overall
	Task Under.	State Perc.	Action Reas.	Seq. Quant.	State Trans.	Outcome Verif.	Recovery Reas.	
Doubao-Seed 2.0 Pro	16.4	9.0	8.9	<u>33.8</u>	45.0	2.5	9.1	18.9
MIMO-V2.5	6.0	<u>6.0</u>	6.4	36.7	20.0	3.7	4.5	<u>17.6</u>
Claude 4.7 Opus	3.0	<u>4.3</u>	<u>7.9</u>	<u>33.8</u>	35.0	4.9	0.0	<u>16.5</u>
GPT-5.5	4.5	3.4	5.9	34.9	20.0	7.4	0.0	16.3
GLM-5V Turbo	7.5	6.0	5.4	32.2	15.0	9.9	4.5	16.2
Grok 4.3	9.0	4.7	<u>7.9</u>	29.5	20.0	4.9	9.1	15.3
Llama-4-Maverick	3.0	2.6	4.4	30.3	20.0	3.7	0.0	13.7
Gemini 3.1 Pro	1.5	4.7	<u>7.9</u>	25.5	20.0	6.2	0.0	13.2
Mistral-Large-2512	1.5	2.6	<u>6.9</u>	26.0	20.0	6.2	0.0	12.7
MiniMax-VL-01-Fast	7.5	2.6	6.4	20.9	45.0	<u>8.6</u>	0.0	11.8
Qwen3-VL-235B	4.5	3.8	4.9	22.3	40.0	1.2	9.1	11.6

Table 2: OpenQA accuracy (%) on the 1000 no-options subset of SWITCH. Responses are evaluated by a strict rubric-based binary LLM judge conditioned on the question, gold answer, and task-specific rubric. Note that UI Recognition is excluded as this specific OpenQA subset contains no spatial-grounding UI items.

obtains 27.33% on MCQ and 16.3% on OpenQA. These absolute differences should not be interpreted as a controlled estimate of answer-option scaffolding, because the two evaluations differ in item composition, skill coverage, and scoring protocol; in particular, UI Recognition is absent from the OpenQA subset. Instead, the OpenQA results show that free-form evaluation exposes failure modes that option selection alone may not reveal. Without candidate choices, models must explicitly generate the relevant state, action, count, outcome, or recovery information, and many responses become incomplete, overly vague, or contradictory under rubric-based grading. Appendix A.4 further analyzes these errors in Table 7, separating exact and paraphrase matches from partial answers, contradictions, and complete misses.

4.2 Probing Generative World Modeling through Interactive Video Generation

SWITCH probes whether current generative models exhibit usable world modeling when asked to continue egocentric device-interaction scenes under explicit task constraints. The goal is not to assess aesthetics, but to test whether models can preserve input scene, operate the correct control, follow the intended action sequence, and make outcomes visually verifiable. We evaluate both image-conditioned and video-conditioned generation.

Experiment Setup As shown in Fig 1, SWITCH covers nine categories. For each category, we sample 20 image-conditioned instances and 5 video-conditioned instances, yielding 180 and 45 inputs, respectively. In the image-conditioned setting, each model receives one egocentric anchor

frame and a prompt specifying the goal, required action sequence, stop condition, visible evidence, and invariance constraints. We test six models: five proprietary systems, Doubao-Seed 2.0 (Team Seedance et al., 2026), Kling3.0 (Team et al., 2025), Runway Gen-4.5³, Veo3.1 (Google, 2025), and Wan2.7 (Wan et al., 2025), and one open-source model, Wan2.2 (Wan et al., 2025). In the video-conditioned setting, each model receives an egocentric clip and a continuation prompt; we evaluate Doubao-Seed 2.0 and Wan2.7. In total, we evaluate 1,170 generated videos: 1,080 in the image-conditioned setting and 90 in the video-conditioned setting. Detailed generation parameters are given in Appendix A.5.

Prompting and evaluation. Prompts explicitly constrain task type, next action, stop condition, required visible evidence, viewpoint, device layout, and object identity. Image-conditioned generation, therefore, requires the model to infer a plausible future interaction from a single frame while preserving the original scene structure. Video-conditioned generation requires the model to continue the scene *after* the observed prefix, rather than replaying or rewriting it. These settings directly test whether the model can maintain latent state, control-function binding, and causal consequences over time.

All generated videos are evaluated by Gemini 3.1 Pro (Google DeepMind, 2026) in a VLM-as-Judge setup. The judge is instructed to rely only on visible evidence and not to reward mere visual plausibility. Each video receives 1–5 scores on four di-

³<https://runwayml.com/research/introducing-runway-gen-4.5>

Input Form	Model	VLM as Judge					HumanEval				
		Scene Fidelity	Control Correctness	Procedure Correctness	Execution Observability	Overall	Scene Fidelity	Control Correctness	Procedure Correctness	Execution Observability	Overall
Single Image to Video	Doubao-Seed 2.0	2.96	2.96	3.04	4.39	2.64	4.05	3.28	3.77	4.65	3.52
	Kling 3.0	1.86	2.36	2.42	3.83	1.87	3.39	3.53	3.65	4.02	3.37
	Runway Gen-4.5	1.61	2.25	2.38	3.56	1.80	3.87	4.09	4.83	4.37	3.44
	Veo 3.1	2.19	2.47	2.70	4.19	2.09	3.55	3.59	4.27	4.62	3.79
	Wan 2.7	2.04	1.98	2.02	3.60	1.72	3.45	3.37	3.62	3.73	3.02
	Wan 2.2	1.55	1.57	1.49	2.99	1.38	2.49	2.97	3.20	4.27	2.87
	Average	2.04	2.26	2.34	3.76	1.92	3.47	3.47	3.89	4.28	3.33
Video to Video	Doubao-Seed 2.0	2.90	3.07	3.13	4.39	2.54	3.98	3.68	3.95	4.40	3.65
	Wan 2.7	2.49	2.37	2.10	3.81	1.83	3.67	2.68	3.05	3.43	2.86
	Average	2.70	2.72	2.62	4.10	2.18	3.83	3.18	3.50	3.92	3.25

Table 3: **VLM-as-Judge and HumanEval results under different input forms.** The first five columns present the VLM-as-Judge results computed from 1,170 valid evaluations. The last five columns show the HumanEval results computed from 160 human-evaluated videos. Single-image input refers to generating a video from an initial frame and a text prompt, while video input denotes generating a video conditioned on a short video clip and a text prompt. Each model row reports the mean score over its evaluated samples, and each Average row reports the arithmetic mean of the listed models within the same input form. All values are averaged on a 1–5 scale, and the best results in each section are highlighted in **bold**.

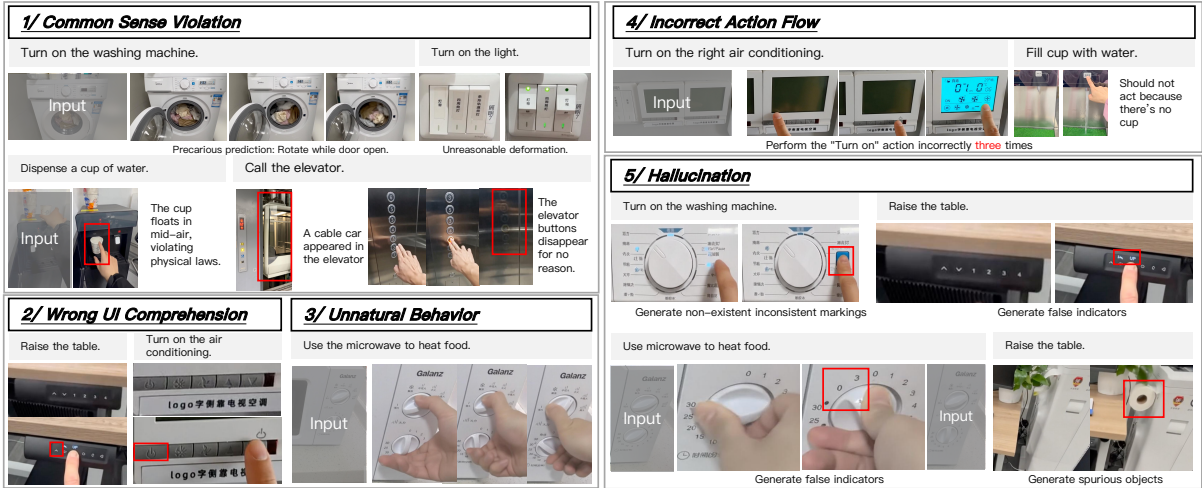


Figure 2: Case studies of representative errors in video generation. Cropped image frames to focus on issues.

mensions: *scene_fidelity*, *control_correctness*, *procedure_correctness*, and *execution_observability*. The judge also outputs an overall score, a confidence score, and major error descriptions. The full evaluation prompt is provided in Appendix A.6.

Automatic results. The VLM-as-Judge results in Table 3 point to a clear gap between visual plausibility and task grounding. Across both input forms, models are much better at making an interaction look legible than at making it correct: *execution_observability* is consistently the strongest dimension (3.76 for image-to-video and 4.10 for video-to-video on average), whereas *scene_fidelity*, *control_correctness*, and *procedure_correctness* remain substantially weaker. In practice, many generations show a recognizable hand–device interaction, but the hand often targets the wrong control, drifts from the original scene, or skips the required

action order. Video conditioning brings only a modest improvement over single-image prompting (overall 2.18 vs. 1.92), suggesting that observing a short prefix helps continuity, but does not solve the harder problem of tracking device state and causal task structure. Doubao-Seed 2.0 performs best in both settings, but the gain is incremental rather than qualitative. Because the automated scores correlate only weakly with human ratings (see Appendix A.7), we interpret this pattern as descriptive evidence rather than a definitive evaluation of interaction competence.

Human evaluation. To provide an independent cross-check of the automated protocol, we conduct a human study on four categories: *Beverage*, *Ecosystem*, *Kitchen*, and *Light*. For each category, we sample five image-conditioned inputs and five video-conditioned inputs, yielding 120

image-conditioned outputs from six models and 40 video-conditioned outputs from two models. The resulting 160 videos are each rated by three blind annotators on the same four dimensions used by the VLM judge, together with an overall score, for 480 individual rating instances.

As shown in Table 3, human raters assign higher absolute scores than the automatic judge and reshuffle parts of the image-conditioned model ranking. The two score sources should therefore be treated as complementary signals rather than interchangeable scales. Nevertheless, both identify the same aggregate bottleneck: models are generally better at rendering observable interactions than at preserving control semantics and procedural correctness. We consequently restrict our qualitative conclusion to this shared pattern: the central failure is not merely unrealistic motion, but unreliable latent state tracking and action semantics. Together with the low inter-rater agreement, this gap is both a limitation and a finding: automated judges should complement rather than replace human evaluation, so we report the reliability results, temper automated claims, and discuss rubric and adjudication improvements in Limitations.

Case study. Figure 2 presents representative failures. These examples expose five recurring failure modes. First, the model violates commonsense or physical constraints, such as rotating a washing machine drum while the door is open, deforming a light switch, or producing impossible elevator states. Second, it misidentifies the relevant UI region or physical control, pressing the wrong button or panel area. Third, it produces unnatural motor behavior, such as attempting to manipulate multiple microwave knobs simultaneously with one hand. Fourth, it breaks procedural logic by repeating actions, ignoring necessary preconditions, or producing outcomes unsupported by the scene, such as dispensing water without a cup. Fifth, it hallucinates UI elements or objects, including nonexistent markings, false indicators, and spurious scene objects. These failures are often visually convincing at a glance, but they reveal weak latent modeling of device state, action preconditions, and causal consequences.

5 Conclusion

We present SWITCH, an offline benchmark for evaluating closed-loop interactive reasoning with tangible control interfaces over real-world egocen-

tric trajectories. SWITCH organizes evaluation into **8 tasks** spanning **three core capabilities**: *Interface Understanding*, *Action & Consequence Reasoning*, and *Closed-loop Reflection*. By moving beyond static perception and open-loop action prediction, SWITCH measures whether models can interpret interface semantics, reason about actions and their consequences, and verify task success from visual feedback in realistic control settings.

Experiments on VLMs and generative models highlight substantial room for improvement. For VLMs, performance remains limited on fine-grained interface grounding, action-and-consequence reasoning, and outcome verification, indicating that general multimodal ability does not yet translate into reliable real-world control understanding. For generative models, both VLM-as-Judge and human evaluation show that visually plausible interaction videos often fail to preserve the correct scene, manipulate the right control, or follow the intended procedure. Taken together, these results position SWITCH as a challenging and practical testbed for advancing grounded multimodal reasoning, closed-loop verification, and world modeling for real-world interactive environments. We believe SWITCH can serve as a strong foundation for developing and evaluating multimodal systems for reliable real-world interaction.

Limitations

This work has several limitations. First, although SWITCH covers over 1,170 device interactive videos across 9 domains, it does not yet capture the full diversity of tangible control interfaces encountered in everyday life. The current release is still concentrated in a limited set of environments and interface styles, and may underrepresent region-specific, language-specific, and industrial control settings. In future iterations, we plan to expand the data collection to more diverse and more international scenarios, with broader geographic, linguistic, and device coverage.

Second, SWITCH is deliberately an offline diagnostic benchmark based on recorded egocentric videos, question answering, and generative continuation. In our terminology, “closed-loop” refers to the state-action-transition-verification-recovery reasoning cycle encoded in these trajectories; models do not physically execute selected actions or receive real-time feedback. This design enables controlled analysis of the reasoning competencies

needed for interaction, but it does not measure actuation errors, latency, safety constraints, or error accumulation during online execution. Future versions will add real-machine interaction data and evaluation settings that more directly reflect online decision making and physical execution.

Third, some evaluation dimensions are less well covered than others. In particular, verification- and recovery-related cases are harder to collect because they often require delayed effects, failed attempts, or multi-step correction trajectories. As a result, these cases are relatively less abundant than standard task-execution examples in the current release. To address this, we plan to collect more failure-driven, delayed-outcome, and multi-step recovery data in order to strengthen the benchmark’s coverage of closed-loop reflection.

Finally, the generative world-model evaluation remains an approximation of interactive competence. The automatic protocol relies on a VLM-as-Judge setup, while the 160-video human study covers a subset of categories and models. The human scores provide an independent aggregate cross-check, but their different absolute scale and partial ranking changes show that automated scores are not substitutes for human ratings. These protocols may also miss subtle errors in causal correctness or long-horizon procedural consistency. Future work will expand paired human evaluation coverage, report direct human-judge agreement and calibration analyses, improve the automatic judging pipeline, and explore more direct evaluation protocols for generated interaction trajectories.

Acknowledgments

We gratefully acknowledge the valuable support provided by Zhongyuan Wang throughout this work. We also sincerely thank Runze Xiao, Aoyang Cai, and Ruochuan Shi for their insightful revision comments.

References

- Harsh Agrawal, Eldon Schoop, Xinlei Pan, Anuj Mahajan, Ari Seff, Di Feng, Ruijia Cheng, Andres Romero Mier Y Teran, Esteban Gomez, Abhishek Sundararajan, Forrest Huang, Amanda Swearngin, Mohana Prasad Sathya Moorthy, Jeff Nichols, and Alexander Toshev. 2025. UINavBench: A framework for comprehensive evaluation of interactive digital agents. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 23353–23363.
- Delong Chen, Willy Chung, Yejin Bang, Ziwei Ji, and Pascale Fung. 2025. WorldPrediction: A benchmark for high-level world modeling and long-horizon procedural planning. *arXiv preprint arXiv:2506.04363*.
- Wei Chow, Jiageng Mao, Boyi Li, Daniel Seita, Victor Guizilini, and Yue Wang. 2025. PhysBench: Benchmarking and enhancing vision-language models for physical world understanding. *arXiv preprint arXiv:2501.16411*.
- Shihan Deng, Weikai Xu, Hongda Sun, Wei Liu, Tao Tan, Jianfeng Liu, Ang Li, Jian Luan, Bin Wang, Rui Yan, and Shuo Shang. 2024. *Mobile-Bench: An evaluation benchmark for llm-based mobile agents*. Preprint, arXiv:2407.00993.
- Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. 2023. Mind2Web: Towards a generalist agent for the web. *Advances in Neural Information Processing Systems*, 36:28091–28114.
- Aaron Foss, Chloe Evans, Sasha Mitts, Koustuv Sinha, Ammar Rizvi, and Justine T. Kao. 2025. *CausalVQA: A physically grounded causal reasoning benchmark for video models*. *arXiv preprint arXiv:2506.09943*.
- Google. 2025. *Veo: A text-to-video generation system*.
- Google DeepMind. 2026. Gemini 3.1 Pro model card. <https://deepmind.google/models/model-cards/gemini-3-1-pro/>.
- Chengshu Li, Ruohan Zhang, Josiah Wong, Cem Gokmen, Sanjana Srivastava, Roberto Martín-Martín, Chen Wang, Gabrael Levine, Michael Lingelbach, Jiankai Sun, and 1 others. 2023. BEHAVIOR-1K: A benchmark for embodied ai with 1,000 everyday activities and realistic simulation. In *Conference on Robot Learning*, pages 80–93. PMLR.
- Kaixin Li, Ziyang Meng, Hongzhan Lin, Ziyang Luo, Yuchen Tian, Jing Ma, Zhiyong Huang, and Tat-Seng Chua. 2025a. *ScreenSpot-Pro: GUI grounding for professional high-resolution computer use*. Preprint, arXiv:2504.07981.
- Silin Li, Yuhang Guo, Jiashu Yao, Zeming Liu, and Haifeng Wang. 2025b. *HomeBench: Evaluating LLMs in smart homes with valid and invalid instructions across single and multiple devices*. Preprint, arXiv:2505.19628.
- Li Puyin, Tiange Xiang, Ella Mao, Shirley Wei, Xinye Chen, Adnan Masood, Li Fei-Fei, and Ehsan Adeli. 2025. QuantiPhy: A quantitative benchmark evaluating physical reasoning abilities of vision-language models. *arXiv preprint arXiv:2512.19526*.
- Christopher Rawles, Sarah Clinckemaillie, Yifan Chang, Jonathan Waltz, Gabrielle Lau, Marybeth Fair, Alice Li, William Bishop, Wei Li, Folawiyo Campbell-Ajala, and 1 others. 2024. AndroidWorld: A dynamic benchmarking environment for autonomous agents. *arXiv preprint arXiv:2405.14573*.

- Gyuhyeon Seo, Jungwoo Yang, Junseong Pyo, Nalim Kim, Jonggeun Lee, and Yohan Jo. 2026. [SimuHome: A temporal- and environment-aware benchmark for smart home LLM agents](#). *Preprint*, arXiv:2509.24282.
- Weihao Tan, Wentao Zhang, Xinrun Xu, Haochong Xia, Gang Ding, Boyu Li, Bohan Zhou, Junpeng Yue, Jiechuan Jiang, Yewen Li, Ruyi An, Molei Qin, Chuqiao Zong, Longtao Zheng, Yujie Wu, Xiaoqiang Chai, Yifei Bi, Tianbao Xie, Pengjie Gu, and 9 others. 2025. Cradle: Empowering foundation agents towards general computer control. In *Forty-second International Conference on Machine Learning, ICML 2025*.
- Kling Team, Jialu Chen, Yuanzheng Ci, Xiangyu Du, Zipeng Feng, Kun Gai, Sainan Guo, Feng Han, Jingbin He, Kang He, Xiao Hu, Xiaohua Hu, Boyuan Jiang, Fangyuan Kong, Hang Li, Jie Li, Qingyu Li, Shen Li, Xiaohan Li, and 49 others. 2025. [Kling-omni technical report](#). *Preprint*, arXiv:2512.16776.
- Team Seedance, De Chen, Liyang Chen, Xin Chen, Ying Chen, Zhuo Chen, Zhuowei Chen, Feng Cheng, Tianheng Cheng, Yufeng Cheng, Mojie Chi, and 1 others. 2026. [Seedance 2.0: Advancing video generation for world complexity](#). *Preprint*, arXiv:2604.14148.
- Rishi Upadhyay, Howard Zhang, Jim Solomon, Ayush Agrawal, Pranay Boreddy, Shruti Satya Narayana, Yunhao Ba, Alex Wong, Celso M de Melo, and Achuta Kadambi. 2026. [WorldBench: Disambiguating physics for diagnostic evaluation of world models](#). *Preprint*, arXiv:2601.21282.
- Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Feiwu Yu, Haiming Zhao, Jianxiao Yang, Jianyuan Zeng, Jiayu Wang, Jingfeng Zhang, Jingren Zhou, Jinkai Wang, Jixuan Chen, Kai Zhu, Kang Zhao, Keyu Yan, and 43 others. 2025. [Wan: Open and advanced large-scale video generative models](#). *Preprint*, arXiv:2503.20314.
- Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh J Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, and 1 others. 2024. OSWorld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *Advances in Neural Information Processing Systems*, 37:52040–52094.
- Weikai Xu, Zhizheng Jiang, Yuxuan Liu, Pengzhi Gao, Wei Liu, Jian Luan, Yuanchun Li, Yunxin Liu, Bin Wang, and Bo An. 2026a. [Mobile-Bench-v2: A more realistic and comprehensive benchmark for vlm-based mobile agents](#). *Preprint*, arXiv:2505.11891.
- Xinrun Xu, Pi Bu, Ye Wang, Börje F. Karlsson, Ziming Wang, Tengtao Song, Qi Zhu, Jun Song, Zhiming Ding, and Bo Zheng. 2026b. [DeepPHY: Benchmarking agentic VLMs on physical reasoning](#). In *Fortieth AAAI Conference on Artificial Intelligence AAAI 2026*.
- Jiahao Zhang, Muqing Jiang, Nanru Dai, Taiming Lu, Arda Uzunoglu, Shunchi Zhang, Yana Wei, Jiahao Wang, Vishal M. Patel, Paul Pu Liang, Daniel Khashabi, Cheng Peng, Rama Chellappa, Tianmin Shu, Alan Yuille, Yilun Du, and Jieneng Chen. 2025a. [World-in-world: World models in a closed-loop world](#). *Preprint*, arXiv:2510.18135.
- Zixin Zhang, Kanghao Chen, Xingwang Lin, Lutaotao Jiang, Xu Zheng, Yuanhuiyi Lyu, Litao Guo, Yinchuan Li, and Ying-Cong Chen. 2025b. PhysTool-Bench: Benchmarking physical tool understanding for mllms. *arXiv preprint arXiv:2510.09507*.
- Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. 2024. [WebArena: A realistic web environment for building autonomous agents](#). *Preprint*, arXiv:2307.13854.

A Evaluation Details

A.1 MCQ Evaluation

For multiple-choice evaluation, each item contains a multimodal query, one or more visual inputs, and a fixed set of candidate answers. Depending on the task format, answer candidates may be text, images, videos, or numeric values. Models are prompted to return only the selected option label or labels. We parse the model response into option labels and compare it with the ground-truth answer.

Single-choice questions. For standard MCQ items, a prediction is counted as correct if the parsed option label exactly matches the ground-truth option. Invalid outputs, empty responses, or responses that cannot be mapped to a valid option are counted as errors and receive zero credit.

Multi-select questions. A subset of outcome-verification questions is multi-select. These items ask models to select all evidence options that demonstrate task success, such as all images or states showing that an operation worked. For these questions, the prediction is counted as correct only if the predicted option set exactly matches the ground-truth set. We additionally compute partial scores for analysis by comparing selected correct and incorrect evidence options, but the main accuracy metric uses exact set matching.

Strong-baseline-filtered hard subset. To construct a harder diagnostic subset, we remove validation and test items correctly answered by Qwen2.5-VL-7B-Instruct. This filtering reduces the influence of language priors and answer-option shortcuts, and focuses evaluation on examples not solved by a strong open-source VLM baseline. All main MCQ results are reported on this filtered subset unless otherwise specified.

Skill aggregation. We aggregate item-level accuracy into the eight evaluation skills used in the main results. Task Understanding uses `vqa_task`; State Perception uses `vqa_state`; UI Recognition uses `ui_grounding`; Action Reasoning uses action questions excluding counting; Sequential Action Quantification uses action-counting questions; State Transition Prediction uses `final_state`; Outcome Verification uses `verification_state` and `verification_action`; Recovery Reasoning uses `recovery`. Overall accuracy is computed over all evaluated items.

A.2 Public Evaluation Subset and Hidden Holdout

In response to community feedback, we release a public evaluation set comprising 1,500 Multiple-Choice QA examples, 500 OpenQA examples, and 108 Interactive Video Generation queries. This release lowers the cost of participation in SWITCH. All publicly released resources are available on [Hugging Face](#). To enable leakage-resistant comparison, we additionally maintain a hidden holdout set whose data and annotations are not publicly released. We welcome the community to submit models for evaluation on this hidden set. Table 4 reports the performance of different models on the hidden holdout set for the Multiple-Choice QA task.

A.3 OpenQA Rubric-Based Judge

For OpenQA, we use a strict rubric-based binary judge. The judge receives the question, gold answer, optional task-specific rubric, and model prediction, and returns a binary correctness decision with diagnostic labels. The judge is instructed to grade semantic correctness rather than surface similarity. Paraphrases, translated device terms, and equivalent UI terminology are accepted when they refer to the same object, state, action, or result. However, missing essential attributes or contradictions make the answer incorrect. Partial answers are recorded diagnostically but receive zero credit.

Contamination check. Before grading, the judge checks whether an OpenQA item appears to be a multiple-choice question mistakenly included in the OpenQA set. Items referring to options, four choices, A/B/C/D, or bare option-letter gold answers are flagged as `multiple_choice_contamination`. Such items receive a score of 0 if the option contents are unavailable.

Type-specific grading rules. Table 5 summarizes the strictness criteria used by the judge for different question types.

Output schema. The judge returns exactly one JSON object. Table 6 lists the required fields.

A.4 OpenQA Diagnostics

Table 7 shows that low OpenQA accuracy is not simply an artifact of strict surface matching. The judge accepts paraphrases as correct, but many

Model	Interface Understanding			Action & Consequence Reasoning			Closed-loop Reflection		Overall
	Task Under.	State Perc.	UI Recog.	Action Reas.	Seq. Quant.	State Trans.	Outcome Verif.	Recovery Reas.	
Proprietary / API Models									
Gemini 3.1 Pro	49.62	54.38	64.52	46.05	12.36	42.19	28.58	36.12	36.64
Claude 4.7 Opus	54.11	43.47	53.84	37.38	26.02	35.24	19.58	18.11	31.01
Doubao-Seed 2.0 Pro	51.83	35.42	59.49	35.29	28.48	37.94	24.07	23.44	29.79
GPT-5.5	49.62	31.28	64.63	38.02	20.61	29.69	15.48	22.34	27.04
Grok 4.3	36.19	25.09	53.49	34.18	25.58	32.78	14.44	14.72	25.73
MIMI-V2.5	29.05	8.27	56.91	27.13	20.61	35.24	6.75	20.87	18.82
GLM-5V Turbo	36.19	29.68	41.37	31.18	22.38	25.51	16.53	25.11	25.48
Open-Weight Models									
Qwen3-VL-235B	21.88	24.14	51.18	24.22	20.17	25.84	8.17	16.63	19.58
Llama-4-Maverick	29.05	19.03	29.09	31.02	13.48	25.51	13.67	17.48	20.59
MiniMax-VL-01-Fast	24.54	27.05	34.58	28.49	16.79	35.24	11.96	25.11	22.88
Mistral-Large-2512	21.88	21.29	23.36	26.47	28.06	25.51	10.25	16.63	21.61

Table 4: Accuracy (%) of leading multimodal models on the hidden SWITCH holdout set. The holdout data and annotations are not publicly released, and models are evaluated through a submission-based protocol. Results are organized by three closed-loop interaction capabilities and eight fine-grained skills. The best and second-best performing models in each metric are **bolded** and underlined, respectively.

model outputs are partial or contradictory. For example, GPT-5.5 produces 290 partial answers but only 163 correct answers, suggesting that it often identifies part of the relevant interaction while missing essential details such as numeric values, action targets, success conditions, or recovery steps.

A.5 Generation Parameters

Table 8 summarizes the generation settings used for each model in our experiments.

A.6 VLM-as-Judge Prompt

For each generated video, we prompt Gemini 3.1 Pro with the video and its corresponding task specification, including the task type, goal, next action, stop condition, required visible evidence, and scene invariance constraints. The judge is instructed to rely only on visible evidence in the generated video, rather than inferring hidden steps or unseen state changes. It is further instructed to evaluate task-grounded correctness instead of visual beauty, and to output a single JSON object. Table 9 summarizes the four evaluation dimensions, while Table 10 lists the required output fields.

Scoring prompt. The judge is instructed with the following rules:

1. **General instruction.** You are an expert judge for egocentric device-interaction videos. Your task is to score whether the generated video accurately and verifiably follows real-world interaction patterns. Judge only from visible

evidence in the generated video. Do not infer hidden steps, unseen states, or unshown corrections. Do not judge visual beauty; judge task-grounded correctness only.

2. **Score scale.** Use a 1–5 scale, where 5 means excellent or strongly correct, 4 means mostly correct, 3 means partially correct, 2 means mostly incorrect, and 1 means severely incorrect.
3. **Dimensions.** Evaluate exactly four dimensions:
 - scene_fidelity
 - control_correctness
 - procedure_correctness
 - execution_observability
4. **Dimension-specific criteria.**
 - scene_fidelity: measures whether the visible scene evidence itself is trustworthy. This dimension combines physical plausibility and hallucination control. It should be scored lower when the video shows fabricated UI elements, labels, buttons, indicators, or text; extra objects or rewritten device structure; view-point jumps or scene redesign; impossible motion, teleportation, disappearance, physics violations, broken scene invariants, or forbidden changes. It should not

Type	Correctness criterion
Counting	Exact numeric answer is required unless the rubric allows tolerance.
Yes/No	The answer must clearly affirm or negate the proposition.
Grounding	The object, region, UI element, state, or action must be specific enough to distinguish it from alternatives.
Action / Procedural	The correct action and target must be named; missing an essential target, direction, button, device, or attribute is incorrect.
Temporal	Events or actions must appear in the correct order.
Verification	The answer must provide the requested outcome or success/failure implication required by the question or rubric.
Recovery	The answer must identify the correct recovery action or correction target when recovery is requested.
State	Essential attributes such as color, number, text, direction, location, on/off state, mode, or selected option must be correct.
Other	The gold answer and rubric are applied directly.

Table 5: Question-type-specific correctness rules used by the OpenQA binary judge.

be used for wrong control choice, wrong step order, or incomplete but visible motion.

- **control_correctness:** measures whether the correct control or region is operated and whether the local feedback matches the intended function. It should be scored lower when the video presses the wrong button, turns the wrong knob, clicks the wrong region, binds the wrong control to the wrong function, or shows local feedback inconsistent with the intended control. It should not be used for step order, missing prerequisites, or action visibility.
- **procedure_correctness:** measures whether the task procedure is complete and logically correct. This dimension combines logical reasoning and action completeness. It should be scored lower when the video skips steps, violates step order, omits prerequisites, stops prematurely, includes unnecessary repetition that breaks the procedure, performs recovery without visible correction, provides insufficient verification evidence, or fails to satisfy the required stop con-

Field	Description
question_type	Inferred task type, such as counting, verification, recovery, temporal, grounding, yes/no, action, procedural, state, or other.
verdict	Binary judgment: correct or incorrect.
score	Binary score, either 1 or 0.
answer_match	Diagnostic label indicating exact match, paraphrase, partial match, contradiction, or complete miss.
essential_missing	List of essential missing details, if any.
wrong_extra_info	Whether the prediction adds contradictory information.
too_vague	Whether the answer is too vague to uniquely identify the required answer.
format_issue	Whether the answer has a formatting or contamination issue.
brief_reason	One concise sentence justifying the score.

Table 6: Required output fields for the OpenQA rubric-based binary judge.

dition. It should not be used for wrong control choice, unclear motion, or fabricated scene content.

- **execution_observability:** measures whether the key action is clearly, completely, and confirmably executed. It should be scored lower when the video shows only partial execution, unclear hand-control contact, action too small to confirm, heavy occlusion, blur, truncation, or repeated ineffective motion. It should not be used for wrong control choice, step order, or fabricated UI.

5. Orthogonality rules. If the problem is fake scene content, reduce `scene_fidelity`. If the problem is wrong control selection, reduce `control_correctness`. If the problem is missing steps, wrong order, or invalid recovery, reduce `procedure_correctness`. If the problem is unclear or incomplete action visibility, reduce `execution_observability`. If a single issue affects multiple dimensions, multiple dimensions may be reduced, but each reason must describe a distinct core issue.

6. Task-type emphasis. For `state_transition_video`, emphasize `next_action`, `required_evidence_ui`, `required_evidence_physical`, and `stop_condition`. For

Model	Overall Correct (%) ↑	Credited (%) ↑		Zero-Credit Errors (%) ↓		
		Exact	Paraphrase	Partial	Contradiction	Complete Miss
Proprietary / API Models						
Doubao-Seed 2.0 Pro	18.9	11.8	7.1	21.5	50.7	8.9
MIMO-V2.5	<u>17.6</u>	13.1	4.5	17.5	59.1	5.8
Claude 4.7 Opus	16.5	12.6	3.9	25.9	47.0	10.6
GPT-5.5	16.3	<u>13.0</u>	3.3	29.0	45.3	9.4
GLM-5V Turbo	16.2	11.9	4.3	26.7	48.0	9.1
Grok 4.3	15.3	10.5	<u>4.8</u>	24.2	52.8	<u>7.7</u>
Gemini 3.1 Pro	13.2	9.6	3.6	25.7	44.9	16.2
Open-Weight & Publicly Available Models						
Llama-4-Maverick	13.7	11.2	2.5	27.4	41.6	17.3
Mistral-Large-2512	12.7	9.7	3.0	15.8	60.4	11.1
MiniMax-VL-01-Fast	11.8	7.8	4.0	18.5	56.2	13.5
Qwen3-VL-235B	11.6	8.4	3.2	22.7	55.9	9.8

Table 7: Diagnostic error distribution (%) on the **SWITCH** OpenQA subset (no-options). Performance is evaluated using our strict rubric-based judgment. *Overall Correct* serves as the primary metric, comprising the sum of *Exact* and *Paraphrase* matches. The remaining five columns represent the complete distribution of the model’s responses (summing to 100%). Answers flagged as *Partial* overlap with the gold reference but omit essential specificity constraints, thus receiving strictly zero credit. The best performing model for each metric is **bolded**, and the second-best is underlined.

Model	Duration (s)	FPS
Seedance 2.0	10	24
Kling v3	10	24
Veo 3.1	8	24
WAN 2.2	5	16
WAN 2.7	10	30
Runway Gen4.5	10	24

Table 8: **Generation parameters used in our experiments.**

verification_state_video, emphasize whether the video shows sufficient evidence for verification. For recovery_video, require visible correction first, then return to post_fix_state, and finally progression toward success.

7. Scoring anchors.

- scene_fidelity: 5 means stable and physically plausible; 4 means mostly stable with minor issues; 3 means visible inconsistencies but still judgeable; 2 means clear physical or scene integrity problems; 1 means severe fabrication or invariant violation.
- control_correctness: 5 means correct control and correct feedback; 4 means mostly correct with minor ambiguity; 3 means partially correct but with weak binding or incomplete feedback; 2

Dimension	Definition
scene fidelity	Whether the visible scene remains trustworthy, physically plausible, and faithful to the input without hallucinated UI, scene redesign, viewpoint jumps, object inconsistencies, or physics violations.
control correctness	Whether the correct control or region is operated and whether the local feedback matches the intended function.
procedure correctness	Whether the action sequence is complete, logically correct, properly ordered, and satisfies the required stop condition.
execution observability	Whether the key action is clearly, completely, and confirmably executed from visible evidence.

Table 9: **Core evaluation dimensions in the VLM-as-Judge protocol.**

means wrong control or misleading feedback; 1 means no valid control interaction or fabricated control behavior.

- procedure_correctness: 5 means correct steps, order, prerequisites, stopping point, and verification or recovery logic; 4 means mostly correct with minor missing steps or ambiguity; 3 means partially correct with weak logical links or missing required steps; 2 means wrong order, missing prerequisites, missing key steps, or insufficient verification; 1 means the task logic is largely broken.

Field	Description
scene_fidelity.score	Integer score from 1 to 5.
scene_fidelity.reason	Short evidence-based explanation.
control_correctness.score	Integer score from 1 to 5.
control_correctness.reason	Short evidence-based explanation.
procedure_correctness.score	Integer score from 1 to 5.
procedure_correctness.reason	Short evidence-based explanation.
execution_observability.score	Integer score from 1 to 5.
execution_observability.reason	Short evidence-based explanation.
overall_score	Overall score on the 1–5 scale.
confidence	Confidence score from 1 to 5.
major_errors	List of major error descriptions.

Table 10: **Required JSON output fields for the VLM judge.**

- **execution_observability:** 5 means the key action is complete, clear, natural, and easy to confirm; 4 means mostly complete with minor stiffness or redundancy; 3 means visible but only partially executed or not fully convincing; 2 means ambiguous, incomplete, or heavily obscured; 1 means the key action is missing or cannot be confirmed.
8. **Overall score.** Score the overall result on the same 1–5 scale. The overall score should be consistent with the four dimension scores, but should not be computed by a fixed weighted formula; instead, it should reflect direct judgment based on the visible evidence.
 9. **Confidence.** Confidence is also rated on a 1–5 scale, where 5 means the evidence is very clear and the judgment is highly reliable, 4 means the evidence is clear with minor ambiguity, 3 means the evidence is usable but somewhat incomplete or uncertain, 2 means the evidence is weak, blurry, or partially missing, and 1 means the evidence is severely insufficient for stable judgment.
 10. **Output format.** Output only a single valid JSON object. Each dimension must contain exactly two keys, score and reason. Scores must be integers from 1 to 5. Reasons must be short, specific, and evidence-based. The output must additionally include overall_score, pass_label, confidence, and major_errors. No markdown, code fences, or extra text are allowed.

A.7 Reliability Analysis of Automatic Evaluation

Table 13 reports the agreement between the VLM-as-Judge scores and human ratings. Spearman’s ρ

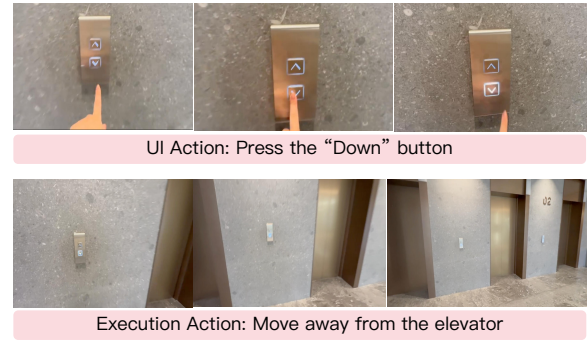


Figure 3: Examples of two action categories. Left: UI Action. Right: Procedural Action.

and Kendall’s τ_b measure rank correlation, MAE denotes mean absolute error, and Krippendorff’s α measures inter-rater agreement.

A.8 Case Study Examples

We include representative MCQ and OpenQA examples to illustrate the main failure modes discussed in Section 4.1.2. The MCQ cases highlight errors in state perception, temporal action reasoning, outcome verification, and recovery. The OpenQA cases show how free-form responses often become partial, contradictory, or too vague under rubric-based judging.

Overall task: "Turn on the microwave's grill mode". Based on the current state shown in the image, what should the operator do next?
Choose the best action.

A. Press the microwave start button.
B. Press the microwave grill button.
C. Set the microwave power level to high.
D. Press the oven's convection bake start key.

Input Image:



Answer Options:

A Press the microwave start button. Ground Truth

B Press the microwave grill button. Model

C Set the microwave power level to high.

D Press the oven's convection bake start key.

Ground Truth:
A. Press the microwave start button.

Model Answer:
B. Press the microwave grill button.

`{"answer": "B"}`

Figure 4: Example (A): A Gemini 3.1 Pro failure on Task 3 / Action Generation in question format: image in question, text as option. The image shows a microwave interface after the grill mode has already been selected. The correct next action is therefore to press the start button to execute the heating process, but the model predicts the grill button instead. This error repeats a completed mode-selection step and shows that the model grounds the appliance category but misses the temporal state of the procedure.

Following the content of the image input and the action "Lower down the set temperature of right panel.", which one of the four provided options will happen first?
A. The screen shows the remain time of washing. The pin code is set.
B. The fan is off.
C. elevator controller button is not activated
D. The set temerature of left panel is 22, the wind speed is low.

Input Image:



Ground Truth:

D

Model Answer:

B

```
### Thinking Process
Looking at the image, I can see two air conditioning control panels. The right panel shows:
- Current room temperature: 24°C
- Set temperature: 25°C
- Fan speed: High (高速)
- Mode: Cool (冷风)

The question asks what happens first when lowering the set temperature on the right panel.

Analyzing the options:
- Option A mentions washing time and pin codes, which are unrelated to air conditioning controls
- Option B mentions the fan turning off
- Option C is about elevator controls, which is unrelated
- Option D refers to the left panel, but we're adjusting the right panel

When lowering the set temperature on an air conditioning unit in cooling mode, if the new set temperature is at or near the current room temperature (24°C), the system may turn off the fan since the desired temperature would be reached. This would be the most immediate response from the system.

### Answer
B
```

Figure 5: Example (B): An example of Qwen3-VL-235B-Instruct on Task 4/ State Transition Prediction in question format: Image in question, text as option. The model fails to predict that the initial outcome of lowering the temperature on an air conditioner control is the change in the visible set temperature.

Overall task: "Boil the water and check if the kettle is working properly.". Based on the context video, what recovery action should be performed next? Choose the best action. The video shows the operator currently stuck in an erroneous state; which recovery action should restore the task to the correct flow?

A. Click the temperature plus key.
 B. Click the fire key.
 C. Click the function key.
 D. Set the heating target to 100°C.

Input Video Frames:



first 4 frames from the original 8-frame sampling, 0.93s video

Answer Options:

☐ A Click the temperature plus key.

☒ B Click the fire key. Ground Truth

☐ C Click the function key. Model

☐ D Set the heating target to 100°C.

Ground Truth:
 B. Click the fire key.

Model Answer:
 C. Click the function key.

`{"answer": "C"}`

Figure 6: Example (C): A Gemini 3.1 Pro failure on Task 5 / Recovery Reasoning in the video-to-text multiple-choice setting. The context video shows a kettle-control interaction in which the operator is in an erroneous or stalled state while trying to boil water and verify that the kettle is working properly. The question asks which recovery action should restore the task to the intended execution flow. The correct answer is **B**, clicking the fire key, because this action re-engages the heating process and recovers from the current incorrect state. Gemini 3.1 Pro instead predicts **C**, clicking the function key. Although this option is visually and semantically close to the correct control, it does not recover the task state required by the current procedure. This case illustrates that strong multimodal models may recognize the appliance and nearby interface controls, yet still fail to identify the recovery-relevant action when procedural state, action history, and control semantics must be jointly reasoned over.

Scene Category	Representative Devices / Interfaces
Lighting	Basic light-switch panels; touch lighting panels; scene-mode lighting panels; dimming and color-temperature controls; meeting-room lighting panels; bathroom light-fan combo panels.
Sanitaryware	Bathroom heater panels; ventilation, drying, heating, and lighting combo panels; water-heater panels; smart toilet side panels; bidet and flush controls; towel-rack or bathroom appliance panels.
Beverage	Water dispensers and purifiers; hot-and-cold water stations; drinking-water systems; coffee machines; beverage machines; kettles and hot-water appliances.
Cleaning	Washing machines; dryers; washer-dryer combo machines; dishwashers; fixed cleaning-device panels; robot-vacuum or housekeeping-device controls.
Building	Elevator hall-call panels; elevator cabin floor panels; public-service kiosks; queue-ticket terminals; access or public-facility control panels.
Ecosystem	Home air-conditioner panels; central HVAC wall controllers; thermostat and floor-heating panels; fans; air purifiers; humidifiers; dehumidifiers; environment and climate-control interfaces.
Kitchen	Microwaves; ovens; air fryers; stovetops; induction cookers; electric pots; rice cookers; range hoods; thermal cooking appliances; kitchen heating and processing controls.
Furniture	Sit-stand desks; lifting platforms; robotic lifting fixtures; motorized furniture controls; electromechanical furniture panels.
Office	Printers; copiers; all-in-one office machines; meeting-room control panels; information terminals; self-service terminals; PC power switches; power-strip controls.

Table 11: Nine scene categories and representative TCI device/interface types covered by SWITCH. The categories strictly align with the scene taxonomy presented in the benchmark overview, encompassing a diverse spectrum of real-world interactive systems.

Category	Statistic	Number
Source Coverage	Source dataset slugs	24
	Scenario families	9
	Interactive videos	1,170
QA Construction	MCQ / visual QA instances	20,075
	Unique OpenQA items	7,471
	Candidate QA items total	27,546
	Hard OpenQA evaluation subset	1,000
	Multi-select MCQ items	2,601
Evaluation Skills	Task Understanding	1,266
	State Perception	3,466
	UI Recognition	577
	Action Reasoning	9,567
	Sequential Action Quantification	2,103
	State Transition Prediction	2,875
	Outcome Verification	5,479
	Recovery Reasoning	2,213

Table 12: Statistics of the current SWITCH benchmark release. MCQ / visual QA instances are counted from the main benchmark directory, while OpenQA items are deduplicated from the OpenQA evaluation pack, which contains a mirrored data/openqa_by_path copy. Multi-select items are verification-state questions requiring exact set matching.

Table 13: Agreement and error between VLM-as-Judge scores and human ratings.

Dimension	ρ	τ_b	MAE [95% CI]	Kripp. α
Scene fidelity	0.221	0.175	1.616 [1.450, 1.787]	0.216
Control correctness	0.309	0.247	1.327 [1.177, 1.481]	0.255
Procedure correctness	0.248	0.194	1.522 [1.363, 1.681]	0.225
Execution observability	0.094	0.078	0.977 [0.841, 1.117]	0.194
Overall	0.330	0.257	1.434 [1.322, 1.551]	0.257

Following the content of the image input and the action "Call the elevator to go upstairs.", which one of the four provided options will happen first?

A. The selected floor is bright now.
B. The washing machine is working.
C. The elevator light is lit, the elevator has arrived
D. The fan is off now.

Input Image:



Ground Truth:

C




Figure 7: Example (D) in question format: Image in question, text as option. Text choices may provide reasoning shortcuts for models.

Answer the question based on the input image (current state) and the four image response options, marked as A/B/C/D. Following the content of the first image input and the action "Call the elevator to go upstairs.", which one of the four provided image options will happen first?

Input Image:



Option Images/Videos:



Ground Truth:

C

Model Answer:

D

Thinking Process
The user's action is to "Call the elevator to go upstairs." The first image shows an elevator call button panel, which is the interface for initiating this action. After pressing the up arrow button (which is visible in the first image), the elevator will begin its journey upwards. The subsequent images show different scenes: an elevator interior with floor buttons (image 2), a coin washer (image 3), and an elevator at floor 30 (image 4), which would be the result of the elevator arriving. Image 5 shows a humidifier, which is unrelated to the action.

Therefore, after calling the elevator, the next logical step is for the elevator to move, which is depicted in image 2 (the floor selection panel inside the elevator) or image 4 (elevator at floor 30). However, since the user is calling the elevator to go upstairs, the immediate consequence is the elevator moving upwards, which would be shown by the elevator's internal display changing or the doors closing to start moving. Image 2 shows the floor buttons inside the elevator, which would be used after the elevator arrives at a floor, not immediately after being called. Image 4 shows the elevator at floor 30, which is the destination, but it's not the immediate next state after calling.

Actually, looking at the sequence again, image 2 shows the elevator's floor selection panel, which is typically seen when you are already inside the elevator. Image 4 shows the elevator at floor 30, which is the final destination after the call. But the question asks what happens "first" after calling the elevator. The most direct visual representation of the elevator responding to a call is seeing the elevator car moving, which might be inferred from the display showing the current floor (like 2 in image 1) and then the elevator starting to move. However, among the options, image 2 is the only one that directly relates to the elevator's operation (floor selection), while image 4 is the final state. Since we need the "first" thing that happens after calling, it's likely the elevator starts moving towards the requested floor. But none of the options explicitly show the elevator moving. Image 2 is the closest as it shows the interior controls, which would be used after entering. However, the action of calling the elevator should lead to the elevator moving, which isn't directly shown in any option. Given the choices, image 2 is the most relevant because it's the next step in using the elevator system after the initial call. But strictly speaking, after calling, the elevator should be seen moving, which isn't shown. Let me reconsider. Perhaps the first thing that happens after calling is seeing the elevator's internal display change or the doors close, but none of the options show that. Image 4 shows the elevator at floor 30, which is the destination, but that would happen after the call. So perhaps image 2 is the answer, as it's the most related to the elevator's operation. Or maybe none of them are correct, but we have to choose. Looking at the context, image 2 is the most logical choice as it represents the elevator's operational interface, which is the next step after calling.

Figure 8: Example (E): An example of Qwen3-VL-235B-Instruct on Task 4/ State Transition Prediction in question format: Image in question, images as option. The model fails to derive that "the elevator is arriving" from Option C, resulting in an incorrect answer.

Overall task: "Use the copy mode of the all-in-one printer to make copies".





Required workflow:

1. Select copier mode
2. Select paper type
3. Select the copy ratio
4. Select the number of copies
5. Start the copier
6. Check if the copier is operating normally

Based on the context video, what should the operator do next? Choose the best action.

- A. Click the A3 option to select the paper type as A3.
- B. Tap the screen, select the '1:1' option to set the copy ratio to 1:1
- C. Click the Letter option to select the paper type as Letter.
- D. Click the Copy Count field to set the number of copies to 1.

Input Media:

first/central frames sampled from switch_mcq_000021_query_video.mp4

Answer Options:

☒ **A** Click the A3 option to select the paper type as A3.
 Ground Truth

☐ **B** Tap the screen, select the '1:1' option to set the copy ratio to 1:1
 Model

☐ **C** Click the Letter option to select the paper type as Letter.

☐ **D** Click the Copy Count field to set the number of copies to 1.

Ground Truth: A

Model Answer: B (openai/gpt-5.5)

question/media source=mcq_hf_1500 | source_file=data.jsonl | answer_match=exact_question

Figure 9: Example (F): An example of GPT 5.5 on Task / Next Action Prediction in question format: Video in question, text as option. The model fails to follow the required copier workflow: after selecting the copier mode, the next action should be selecting the paper type as A3, but the model incorrectly predicts setting the copy ratio to 1:1.

What visible device or environment state is shown in this image?
A. The ventilation button is pressed.
B. The heating button is pressed.
C. The ventilation button is not pressed.
D. The night light button is pressed.

Input Media:




Image input from query_image.jpg

Answer Options:

A The ventilation button is pressed.	Ground Truth
B The heating button is pressed.	Model
C The ventilation button is not pressed.	
D The night light button is pressed.	

Ground Truth: A

Model Answer: B (openai/gpt-5.5)

question/media source=mcq_public_test_1500 | source_file=test.jsonl | answer_match=exact_question | scenario=Bathroom Heater Ventilation Panel

Figure 10: Example (G):An example of GPT5.5 on Task / State Recognition in question format: Image in question, text as option. The model fails to identify the visible pressed button on the bathroom heater ventilation panel: the correct state is that the ventilation button is pressed, but the model incorrectly predicts that the heating button is pressed.