

Chat-Driven Text Generation and Interaction for Person Retrieval

Zequn Xie¹, Chuxin Wang¹, Sihang Cai¹,
Yeqiang Wang², Shulei Wang¹, Tao Jin¹ *

¹Zhejiang University

² Northwest A&F University

Correspondence: zqxi@zju.edu.cn

Abstract

Text-based person search (TBPS) enables the retrieval of person images from large-scale databases using natural language descriptions, offering critical value in surveillance applications. However, a major challenge lies in the labor-intensive process of obtaining high-quality textual annotations, which limits scalability and practical deployment. To address this, we introduce two complementary modules: **Multi-Turn Text Generation (MTG)** and **Multi-Turn Text Interaction (MTI)**. MTG generates rich pseudo-labels through simulated dialogues with MLLMs, producing fine-grained and diverse visual descriptions without manual supervision. MTI refines user queries at inference time through dynamic, dialogue-based reasoning, enabling the system to interpret and resolve vague, incomplete, or ambiguous descriptions—characteristics often seen in real-world search scenarios. Together, MTG and MTI form a unified and annotation-free framework that significantly improves retrieval accuracy, robustness, and usability. Extensive evaluations demonstrate that our method achieves competitive or superior results while eliminating the need for manual captions, paving the way for scalable and practical deployment of TBPS systems.

1 Introduction

Text-based person search (TBPS) aims to retrieve images of a target individual from large-scale galleries using natural language descriptions (Li et al., 2017a). It lies at the intersection of image-text retrieval (Lei et al., 2022; Sun et al., 2021; Miech et al., 2021) and image-based person re-identification (Re-ID) (He et al., 2021; Luo et al., 2019; Wang et al., 2022a), offering a flexible alternative to visual queries. Text queries are more accessible and often provide richer semantic cues about identity, enabling applications ranging from

personal photo organization to public security and surveillance.

Since the seminal introduction of CUHK-PEDES (Li et al., 2017a), TBPS has made substantial progress, largely driven by advances in cross-modal representation learning that align visual and textual modalities in a shared embedding space (Radford et al., 2021). However, despite these technical developments, one fundamental bottleneck remains: the reliance on high-quality textual annotations. While visual data can be easily acquired from surveillance footage, generating accurate and semantically rich descriptions is labor-intensive, expensive, and inherently unscalable.

Automated captioning methods provide a partial solution, but often suffer from semantic drift, repetitive phrasing, and hallucinated content (Kolouju et al., 2025), leading to vague or misleading labels (see Figure 1). This limitation motivates a central research question: *Can TBPS be achieved effectively without depending on manually crafted descriptions?*

To address this challenge, we propose **Chat-Driven Text Generation and Interaction (CTGI)**, a unified and annotation-free framework that bridges the supervision gap via multimodal dialogue. **CTGI** consists of two synergistic modules: **Multi-Turn Text Generation (MTG)**, which provides training supervision, and **Multi-Turn Text Interaction (MTI)**, which refines queries at inference time (see Figure 2).

The **MTG** module simulates multi-turn conversations with an MLLM to generate rich pseudo-labels. Starting from a baseline caption, it iteratively refines the description using a series of attribute-targeted prompts that mimic human dialogue. This process leads to semantically dense, diverse, and fine-grained annotations that far exceed the quality of single-turn captioning. To accommodate these longer descriptions, we extend CLIP’s default 77-token input limit by applying po-

*Corresponding Author.

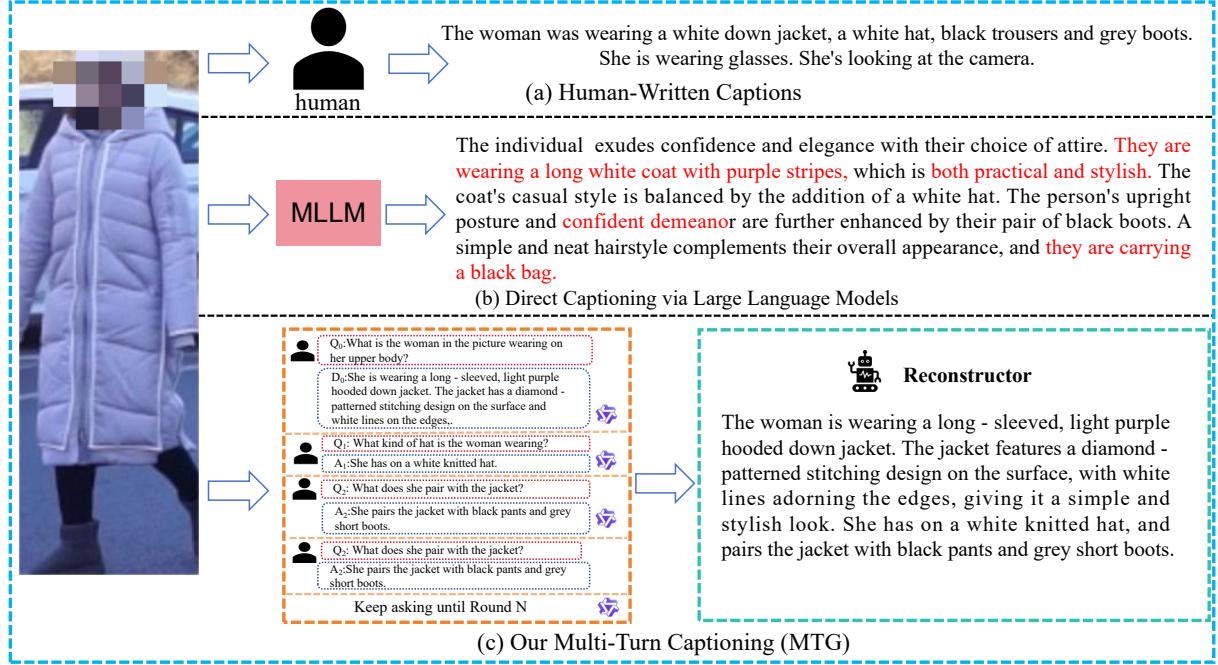


Figure 1: Comparison of person description strategies. (a) Human-written captions are concise but often lack compositional depth and attribute coverage. (b) Direct captioning with large language models (LLMs) generates descriptions in a single forward pass, but often suffers from hallucinations or omissions—particularly in capturing fine-grained visual details such as clothing, accessories, or scene context. (c) Our proposed multi-turn strategy simulates an interactive dialogue with the MLLM, progressively enriching descriptions through targeted Q&A, yielding more expressive, accurate, and human-aligned captions.

sitional embedding stretching—retaining the first 20 learned positions and interpolating the remaining embeddings to support up to 248 tokens without retraining the model.

The **MTI** module operates during inference to refine under-specified user queries through MLLM-driven dialogue. It begins by identifying a candidate anchor image and then generates targeted questions to extract missing or ambiguous attributes. The responses are aggregated into a refined query that is better aligned with the target image. MTI also incorporates filtering mechanisms to avoid redundancy and maintain efficiency. As a plug-and-play module, MTI can be easily deployed with various pretrained vision-language retrieval models with minimal adaptation cost.

Our key contributions are as follows:

- We propose **CTGI**, a novel chat-driven framework for TBPS that eliminates the need for manual annotations by unifying pseudo-caption generation and interactive query refinement.
- We develop **MTG**, a multi-turn captioning module that generates rich, attribute-aware pseudo-labels through iterative dialogue, and

supports long-text encoding via positional embedding extension.

- We introduce **MTI**, a dynamic inference module that refines natural language queries via MLLM-guided interaction, enhancing alignment between user input and visual content for more accurate retrieval.

2 Related Work

2.1 Text-Based Person Search (TBPS)

has progressed significantly since the release of CUHK-PEDES (Li et al., 2017a). Early efforts focused on embedding visual and textual data into a shared space, evolving from global alignment (Zheng et al., 2020; Farooq et al., 2020) to fine-grained matching (Chen et al., 2018, 2022; Suo et al., 2022), often enhanced by pose cues (Jing et al., 2020), part-level features (Wang et al., 2020), or semantic knowledge (Loper and Bird, 2002). In parallel, representation learning approaches aimed to extract modality-invariant features by addressing background clutter (Zhu et al., 2021a), color sensitivity (Wu et al., 2021), and multi-scale fusion (Shao et al., 2022; Wang et al.,

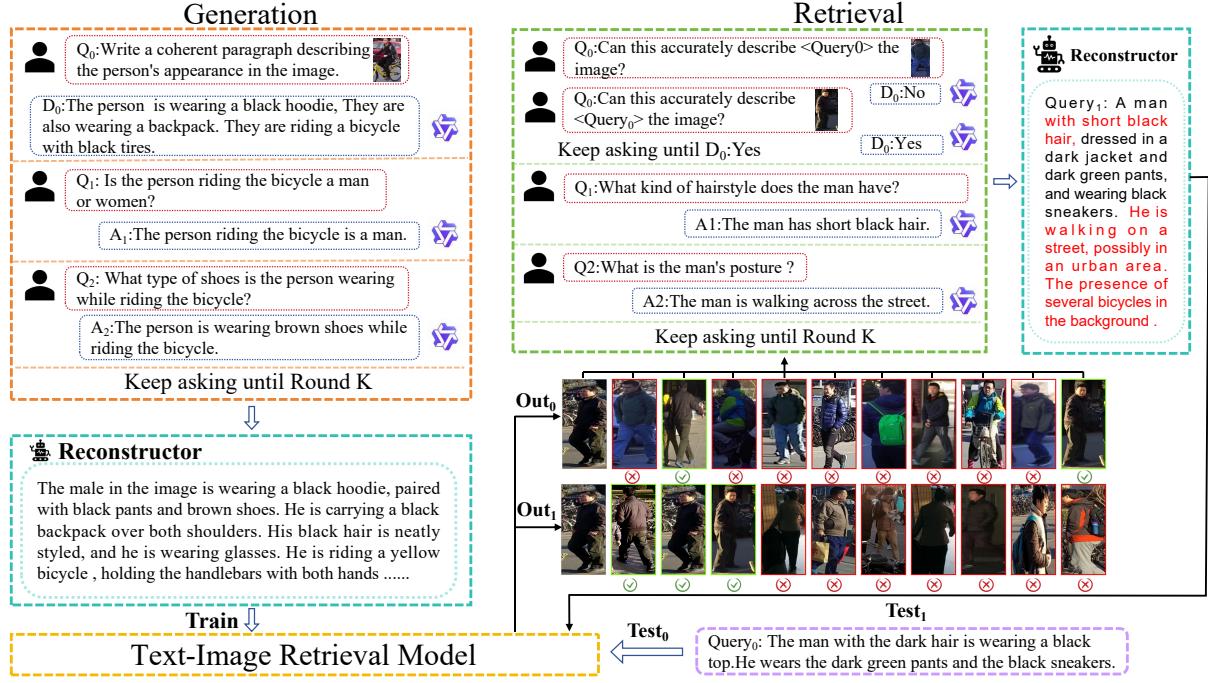


Figure 2: Overview of the proposed **CTGI** framework for text-based person search. The framework consists of two stages: (1) **Training-time generation**: MTG simulates multi-turn dialogue to iteratively enrich captions, while a reconstructor synthesizes pseudo-labels using structured prompts; and (2) **Inference-time retrieval**: MTI refines user queries through MLLM-driven Q&A, enhancing alignment between the query and candidate images for improved re-ranking.

2024b). Recently, large-scale pretrained models like CLIP (Radford et al., 2021) have enabled strong generalization for cross-modal retrieval with minimal tuning (Jiang and Ye, 2023b; Han et al., 2021; Wei et al., 2023), with IRRA (Jiang and Ye, 2023b) and DURA (Xie et al., 2025) improving alignment via multimodal interaction. Despite these advances, most TBPS methods still depend on costly human-annotated text, limiting scalability. Weakly supervised (Zhao et al., 2021) and synthetic labeling (Yang et al., 2023; Tan et al., 2024) offer partial relief but struggle with vague or conversational queries.

To overcome this limitation, we propose a new TBPS paradigm—**CTGI**—which eliminates the reliance on manual annotations and significantly enhances retrieval through multi-turn dialogue with MLLMs. In contrast to earlier interactive retrieval systems (Guo et al., 2018; Lee et al., 2024), which often require task-specific data or model retraining, CTGI supports open-ended queries centered on behavioral attributes and dynamically refines both pseudo-labels during training and user queries during inference. By leveraging MLLMs as plug-and-play agents, CTGI achieves a robust, scalable, and annotation-free TBPS framework.

Vision-Language Pre-training and Multimodal Large Language Models

The landscape of multimodal research has been fundamentally reshaped by the success of Vision-Language Pre-training. This approach aligns visual and textual data, enabling remarkable zero-shot transfer capabilities that allow models to perform a wide range of downstream tasks, such as text-based image retrieval, without task-specific fine-tuning. Building on this foundation, recent efforts have advanced MLLMs. Key research directions include enhancing their reasoning abilities (Guo et al., 2025a), improving underlying representations for better cross-modal generalization (Huang et al., 2025), and utilizing prompt-based learning to steer model behavior. Studies have explored techniques such as efficient prompting for adaptation (Guo et al., 2025b), dynamic prompt calibration for continual retrieval tasks (Jin et al., 2024), and contrast-augmented prompts to enhance robustness (Fu et al., 2024). Our proposed **CTGI** framework is directly inspired by these advancements. We leverage the descriptive and conversational power of MLLMs (Cheng et al., 2025) to create an interactive, annotation-free system for person search.

3 Methodology

In this section, we briefly outline a **Chat-Driven Text Generation and Interaction (CTGI)** model for person retrieval. The CTGI model framework consists of two main modules: (1) The Multi-Turn Text Generation (**MTG**) module, which uses a multimodal large language model to generate detailed textual descriptions for given person images through an interactive Q&A dialogue; and (2) The Multi-Turn Text Interaction (**MTI**) module, which is used in an inference-time pipeline that refines the textual query by leveraging visual context from retrieved images and then performs re-ranking. The overall framework is illustrated in Figure 2.

3.1 Multi-Turn Text Generation

The Multi-Turn Text Generation module generates a comprehensive pseudo-label for each person image I by iteratively querying a multimodal large language model for fine-grained details. This process is initiated with an initial captioning prompt designed to elicit a general description. Given an image I , we can use the MLLM with a prompt P_{init} , *e.g.*, “*Describe the person in the image*,” yielding an initial static caption T_s :

$$T_s = \text{MLLM}(I, P_{\text{init}}), \quad (1)$$

However, T_s provides only a simple, basic textual description and often overlooks distinctive attributes. To capture more distinctive attributes of a person, the QA-guided refinement rounds method provides a more detailed textual description improvement strategy. Specifically, in each round i , the model generates an answer a_i that aligns with the image content based on a specific question q_i , *e.g.*,

q_i : *Is the person riding the bicycle?*
 a_i : *Yes, the person is riding the bicycle.*

After N rounds of QA operations, we obtain all preceding QA results $\{(q_i, a_i)\}_{i=1}^N$ concatenated together to obtain the enriched caption T_e :

$$T_e = \text{MLLM}([a_1, a_2, \dots, a_N]), \quad (2)$$

Compared to T_s , T_e provides more fine-grained attributes for the given person image, *e.g.*, colors, clothing details, and physical features, which greatly enhance the textual description.

It is important to note that due to the presence of similar questions in the question list, this may lead

to repetitive answers. To remove the redundant descriptions, we use the MLLM again and reconstruct T_e by incorporating T_s :

$$T_e = \text{MLLM}(T_e \mid T_s, p), \quad (3)$$

where p denotes the input prompt to the MLLM, *e.g.*, “*Rephrase the description using all the above information*.” Compared to T_e in Eq. (2), T_e in Eq. (3) provides a more concise and effective textual description, rather than increasing the quantity of image-related details. Meanwhile, compared to T_s in Eq.(1), T_e contains more details extracted during the MLLM Q&A process, and better aligns with human attention to core image information.

3.2 More Text Positional Embeddings

CLIP’s original 77-token limit, imposed by its fixed-length absolute positional embeddings, restricts its ability to process long and detailed text—a critical limitation for tasks such as Text-Based Person Search (TBPS). To address this, we adopt a knowledge-preserving *positional embedding stretching* technique that extends the model’s input capacity while maintaining compatibility with pretrained weights.

Following Long-CLIP (Zhang et al., 2024) and FineLIP(Asokan et al., 2025), we preserve the first 20 learned positional embeddings, which are empirically the most well-trained, and interpolate the remaining positions (21–77) to reach a new input length of 248 tokens by applying a $4\times$ stretching factor.

Let $PE(pos)$ denote the original positional embedding at position $pos \in [1, 77]$. We construct the stretched embedding $PE^*(pos)$ for the extended range $pos \in [1, 248]$ as:

$$PE^*(pos) = \begin{cases} PE(pos), & \text{for } pos \leq 20 \\ (1 - \alpha) \cdot PE\left(\left\lfloor \frac{pos}{\lambda_2} \right\rfloor\right) + \alpha \cdot PE\left(\left\lceil \frac{pos}{\lambda_2} \right\rceil\right), & \text{for } 21 \leq pos \leq 77 \end{cases} \quad (4)$$

Here, $\lambda = \frac{248-20}{77-20} \approx 4$ is the interpolation factor, and α is the fractional part of $\frac{pos-20}{\lambda}$. This ensures smooth interpolation while preserving pretrained embeddings for the initial positions.

Inspired by LiT (Zhai et al., 2022), this approach avoids reinitialization or retraining, and allows CLIP to encode longer, semantically rich descriptions generated by the MTG module. Empirical results in Table 4 confirm that this strategy enhances retrieval performance without sacrificing alignment learned during pretraining.

3.3 Multi-Turn Text Interaction (MTI)

MTI operates during inference to resolve under-specified or vague user queries through multi-turn interaction.

Step 1: Anchor Identification. Given a user query q , the system retrieves top- K candidates $\{\hat{v}_1, \dots, \hat{v}_K\}$ using similarity score $S_{q,v}$. For each \hat{v}_k , the MLLM is prompted to judge alignment with q . The first affirmative response identifies the anchor \bar{v} . If no match is found within K attempts, no refinement is applied.

Step 2: Interactive Refinement. With anchor \bar{v} , MTI generates a diagnostic question set $\{c_i\}$ focused on missing attributes. Responses are obtained via visual Q&A:

$$r_{\bar{v}} = \text{MLLM}(T_{\text{vqa}}(\{c_i\}, \bar{v})) \quad (5)$$

The final query \hat{q} is synthesized using a template prompt to merge $r_{\bar{v}}$ and q :

$$\hat{q} = \text{MLLM}(T_{\text{aggr}}(r_{\bar{v}}, q)) \quad (6)$$

Step 3: Re-ranking. The final similarity is computed as:

$$\hat{S}_{q,v} = \lambda S_{q,v} + (1 - \lambda) S_{\hat{q},v} \quad (7)$$

with $\hat{S}_{q,\bar{v}} = 1$ to promote anchor matching. Early stopping is triggered when \hat{v}_1 surpasses threshold $\xi = 0.85$.

3.4 Reconstructor

The **Reconstructor** plays a pivotal role in transforming fragmented outputs from multi-turn Q&A into coherent and high-quality descriptions. It is deployed in both training and inference pipelines to enhance the effectiveness of CTGI without requiring any manual annotations or dataset-specific tuning. To ensure the quality of generated descriptions during training, MTG maintains a dynamic question pool and discards Q&A pairs that exhibit low semantic relevance or redundant information. This filtering helps avoid overlong or repetitive captions.

For synthesis, the Reconstructor leverages the **GPT-4o API** to convert structured Q&A logs into fluent and semantically rich pseudo-captions. These refined captions serve as supervision signals for training downstream retrieval models.

In the inference stage, the Reconstructor also contributes to query refinement within MTI. A set of curated diagnostic templates is used to identify

typical ambiguities. These templates help elicit missing attributes without introducing generic or noisy questions. The responses are then aggregated into a revised query that is semantically aligned with the visual anchor.

This unified design ensures that CTGI can support both training-time pseudo-label generation and test-time query refinement effectively—without reliance on human-written descriptions or task-specific engineering.

4 Experiments

To validate the efficacy and robustness of our proposed framework, we conduct a comprehensive set of experiments. Our evaluation strategy begins by re-annotating three public datasets, generating enriched textual descriptions that provide greater semantic depth and diversity than the original captions. We then systematically compare retrieval models trained on these generated pseudo-labels against baseline models trained on the original annotations. To assess the framework’s generalizability, we integrate our method into standard TBPS pipelines to evaluate its impact. Finally, a series of in-depth ablation studies and visual analyses are performed to comprehensively dissect the contributions of each component and better understand the method’s overall effectiveness.

4.1 Datasets and Performance Measurements

Datasets. We evaluate our approach using three Text-based Person Retrieval datasets: CUHK-PEDES (Li et al., 2017b), ICFG-PEDES (Ding et al., 2021b), and RSTPReid (Zhu et al., 2021b). Our training solely utilizes image data, devoid of any dependency on manually annotated text data. During the testing phase, captions from the dataset are leveraged for re-trieval.

Evaluation Metrics. Following standard practice, we evaluate using Rank-k ($k=1,5,10$), mean Average Precision (mAP). Higher values indicate better retrieval performance.

4.2 Implementation Details

We evaluate **CTGI** using two strong TBPS baselines: **IRRA** (Jiang and Ye, 2023a) and **RDE** (Qin et al., 2024), both built on **CLIP-ViT/B-16** (Radford et al., 2021). For multimodal reasoning, we adopt **Qwen2-VL-7B** (Wang et al., 2024a) as the core MLLM, while the **Reconstructor** leverages the **OpenAI GPT-4o API** (OpenAI, 2023) for pseudo-caption synthesis.

Table 1: Performance on CUHK-PEDES . *: trained with LLaVA-1.5 captions. The best and second-best results are in **bold** and underline, respectively.

Methods	Ref.	Image Enc.	Text Enc.	R-1	R-5	R-10	mAP
Fully Supervised							
TIMAM (Sarafianos et al., 2019)	ICCV’19	RN101	BERT	54.51	77.56	79.27	-
ViTAA (Wang et al., 2020)	ECCV’20	RN50	LSTM	54.92	75.18	82.90	51.60
NAFS (Gao et al., 2021)	arXiv’21	RN50	BERT	59.36	79.13	86.00	54.07
DSSL (Zhu et al., 2021a)	ACMMM’21	RN50	BERT	59.98	80.41	87.56	-
SSAN (Ding et al., 2021a)	arXiv’21	RN50	LSTM	61.37	80.15	86.73	-
Lapscore (Wu et al., 2021)	ICCV’21	RN50	BERT	63.40	-	87.80	-
ISANet (Yan et al., 2022b)	arXiv’22	RN50	LSTM	63.92	82.15	87.69	-
SAF (Li et al., 2022)	ICASSP’22	ViT-Base	BERT	64.13	82.62	88.40	-
DCEL (Qin et al., 2022)	ACMMM’22	CLIP-ViT	CLIP-Xformer	71.36	88.11	92.48	64.25
IVT (Shu et al., 2022)	ECCV’22	ViT-Base	BERT	65.59	83.11	89.21	-
CFine (Yan et al., 2022a)	TIP’23	CLIP-ViT	BERT	69.57	85.93	91.15	-
IRRA (Jiang and Ye, 2023c)	CVPR’23	CLIP-ViT	CLIP-Xformer	73.38	89.93	93.71	66.13
BiLMA (Fujii and Tarashima, 2023)	ICCV’23	CLIP-ViT	CLIP-Xformer	74.03	89.59	93.62	66.57
PBSL (Shen et al., 2023)	ACMMM’23	RN50	BERT	65.32	83.81	89.26	-
BEAT (Ma et al., 2023)	ACMMM’23	RN101	BERT	65.61	83.45	89.54	-
LCR ² S (Yan et al., 2023)	ACMMM’23	RN50	TextCNN	67.36	84.19	89.62	59.24
DCEL (Li et al., 2023)	ACMMM’23	CLIP-ViT	CLIP-Xformer	75.02	90.89	94.52	-
UniPT (Shao et al., 2023)	ICCV’23	CLIP-ViT	CLIP-Xformer	68.50	84.67	-	-
TBPS (Cao et al., 2024)	AAAI’24	CLIP-ViT	CLIP-Xformer	73.54	88.19	92.35	65.38
RDE (Qin et al., 2024)	CVPR’24	CLIP-ViT	CLIP-Xformer	75.94	90.14	94.12	67.56
CFAM (Zuo et al., 2024)	CVPR’24	CLIP-ViT	CLIP-Xformer	75.60	90.53	-	67.27
MGRL (Lv et al., 2024)	ICASSP’24	CLIP-ViT	CLIP-Xformer	73.91	90.68	-	67.28
OCDL (Li et al., 2025a)	ICASSP’25	CLIP-ViT	CLIP-Xformer	75.10	89.43	-	68.18
Unsupervised							
IRRA* (Li et al., 2025b)	CVPR’23	CLIP-ViT	CLIP-Xformer	32.94	54.37	64.67	30.87
BLIP* (Li et al., 2025b)	ICML’22	BLIP-ViT	BLIP-Xformer	51.41	71.41	78.76	44.73
GTR (Bai et al., 2023)	MM’23	BLIP-ViT	BLIP-Xformer	47.53	68.23	75.91	42.91
MUMA (Li et al., 2025b)	AAAI’25	BLIP-ViT	BLIP-Xformer	59.52	77.79	-	52.75
Ours (with IRRA)	EMNLP’25	CLIP-ViT	CLIP-Xformer	<u>63.53</u>	<u>80.25</u>	<u>87.84</u>	<u>52.37</u>
Ours (with RDE)	EMNLP’25	CLIP-ViT	CLIP-Xformer	67.82	85.45	90.63	55.14

All models follow the original training setups of IRRA and RDE. Input images are resized to 384×128 , and standard augmentations (flip, crop, erase) are applied. To support longer text, we extend CLIP’s 77-token limit to **248 tokens** by preserving the first 20 positional embeddings and interpolating the rest $4\times$, following (Zhai et al., 2022). The learning rate is set to 1×10^{-5} (with 5 warmup epochs from 1×10^{-6}), and 5×10^{-5} for randomly initialized layers. Cosine decay is used throughout 60 training epochs.

During training, the **MTG** module runs **6 Q&A rounds** per image to generate dense pseudo-labels. For inference, **MTI** examines the top $K = 20$ retrieval candidates, and early exits if the top-1 similarity exceeds $\xi = 0.85$ and is confirmed by

the MLLM. Final retrieval scores are fused via weighted re-ranking. All experiments are conducted on **2 \times NVIDIA RTX 4090 GPUs** with generation temperature fixed at **0.01** for stability.

4.3 Comparison with the State-of-the-Art

We evaluate the effectiveness of our proposed CTGI framework on three widely used benchmark datasets for text-based person search, comparing against both unsupervised and fully supervised state-of-the-art methods. Our framework is instantiated with two variants, *Our+IRRA* and *Our+RDE*, which employ different retrieval backbones while sharing the same underlying CTGI components.

CUHK-PEDES: As reported in Table 1, under the unsupervised setting, our *Our+RDE* achieves

a Rank-1 of 67.82% and mAP of 55.14%, substantially outperforming the strongest unsupervised baseline MUMA, which obtains 59.52% and 52.75% respectively. Notably, *Our+IRRA* also surpasses MUMA by a clear margin, demonstrating the strong efficacy of CTGI in generating informative pseudo-labels and improving retrieval without manual annotations. Compared with fully supervised methods, our results approach competitive levels, surpassing several mid-tier supervised models and narrowing the gap to the top performers.

ICFG-PEDES: Table 2 shows that our framework maintains state-of-the-art performance in the unsupervised category with a Rank-1 of 56.16% and mAP of 32.40% for *Our+RDE*, exceeding the best supervised methods in some metrics. This highlights CTGI’s robustness and generalization ability across datasets with different granularity and annotation styles. The improvements over other unsupervised baselines such as BLIP and GTR further confirm the superiority of our approach.

RSTPReid: As shown in Table 3, on the RSTPReid dataset, *Our+RDE* achieves a Rank-1 of 66.35% and mAP of 51.51%, outperforming the second-best unsupervised method MUMA by approximately 12% in Rank-1 and over 11% in mAP. Moreover, our method exceeds the performance of several fully supervised models, including CFine, illustrating the strong competitiveness and scalability of CTGI without reliance on any manual annotations.

Across all datasets, our CTGI framework demonstrates a consistent and significant improvement over existing unsupervised methods, closing the gap towards fully supervised performance. These results validate the effectiveness of leveraging multimodal large language models for pseudo-label generation and interactive query refinement, enabling robust and scalable text-based person search in practical scenarios.

4.4 Ablation Study

We conduct ablation experiments on the RSTPReid dataset to systematically analyze the individual and combined effects of MTG and MTI. When employed separately, MTG enhances retrieval by generating detailed and semantically rich pseudo-labels, resulting in notable improvements in Rank-1 accuracy and mAP over the baseline. For instance, with the IRRA backbone, MTG alone achieves a Rank-1 of 52.30%, indicating its strong ability to provide effective training supervision through en-

Table 2: Performance on ICFG-PEDES. *: trained with LLaVA-1.5 captions. The best and second-best results are in **bold** and underline, respectively.

Method	R@1	R@5	R@10	mAP
Fully Supervised				
Dual Path (Zheng et al., 2020)	38.99	59.44	68.41	-
CMPM/C (Zhang and Lu, 2018)	43.51	65.44	74.26	-
ViTAA (Wang et al., 2020)	50.98	68.79	75.78	-
SSAN (Ding et al., 2021a)	54.23	72.63	79.53	-
IVT (Shu et al., 2022)	56.04	73.60	80.22	-
ISANet (Yan et al., 2022b)	57.73	75.42	81.72	-
CFine (Yan et al., 2022a)	60.83	76.55	82.42	-
IRRA (Jiang and Ye, 2023c)	63.46	80.25	85.82	38.06
BiLMA (Fujii and Tarashima, 2023)	63.83	80.15	85.74	38.26
PBSL (Shen et al., 2023)	57.84	75.46	82.15	-
BEAT (Ma et al., 2023)	58.25	75.92	81.96	-
LCR ² S (Yan et al., 2023)	57.93	76.08	82.40	38.21
DCEL (Li et al., 2023)	64.88	81.34	86.72	-
UniPT (Shao et al., 2023)	60.09	76.19	-	-
TBPS (Cao et al., 2024)	65.05	80.34	85.47	39.83
CFAM (Zuo et al., 2024)	65.38	81.17	-	39.42
MGRL (Lv et al., 2024)	67.28	63.87	-	82.34
OCDL (Li et al., 2025a)	64.53	80.23	-	40.76
Unsupervised				
IRRA* (Li et al., 2025b)	21.23	37.37	46.04	11.47
BLIP* (Li et al., 2025b)	31.58	52.03	61.73	13.20
GTR (Bai et al., 2023)	28.25	45.21	53.51	13.82
MUMA (Li et al., 2025b)	38.11	56.01	63.96	19.02
Ours (with IRRA)	<u>48.76</u>	<u>67.38</u>	<u>74.66</u>	<u>27.42</u>
Ours (with RDE)	56.16	73.18	79.42	32.40

riched textual descriptions.

Similarly, MTI, which refines user queries at inference time via multi-turn dialogue, independently boosts performance by improving the semantic alignment between queries and visual features. This is reflected by an increased Rank-1 accuracy of 55.50% with IRRA, highlighting MTI’s effectiveness in mitigating ambiguity in free-form textual queries.

Importantly, the integration of MTG and MTI yields complementary benefits, producing the highest gains across all metrics. Combined, they achieve Rank-1 accuracies of 64.20% and 66.35% with IRRA and RDE backbones respectively, alongside corresponding mAP improvements. These results confirm that the synergy between richer pseudo-label generation and dynamic query refinement substantially advances cross-modal retrieval performance and robustness.

4.5 Visualization of Retrieval Results

To evaluate the effectiveness of MTI, we conducted controlled experiments with a fixed operation cycle. Figure 3 visualizes the top-10 retrieval results before and after applying MTI. Notably, the retrieval model is trained solely on pseudo-captions generated by the MTG module, without any manual



Figure 3: Top-10 retrieval results on the RSTPReid dataset. The first column is the ground-truth image. The first row shows retrieval results using IRRA; the second row shows results after applying IRRA with MTI. Refined queries generated by multi-turn interaction are shown alongside each example. Green borders indicate correct matches.

Table 3: Performance on RSTPReid. *: trained with LLaVA-1.5 captions. The best and second-best results are in **bold** and underline, respectively.

Methods	R-1	R-5	R-10	mAP
Fully Supervised				
DSSL (Zhu et al., 2021a)	39.05	62.60	73.95	-
SSAN (Ding et al., 2021a)	43.50	67.80	77.15	-
LBUL (Wang et al., 2022b)	45.55	68.20	77.85	-
IVT (Shu et al., 2022)	46.70	70.00	78.80	-
CFine (Yan et al., 2022a)	50.55	72.50	81.60	-
IRRA (Jiang and Ye, 2023c)	60.20	81.30	88.20	47.17
BILMA (Fujii and Tarashima, 2023)	61.20	81.50	88.80	48.51
PBSL (Shen et al., 2023)	47.80	71.40	79.90	-
BEAT (Ma et al., 2023)	48.10	73.10	81.30	-
LCR ² S (Yan et al., 2023)	54.95	76.65	84.70	40.92
DCEL (Li et al., 2023)	61.35	83.95	90.45	-
TBPS (Cao et al., 2024)	61.95	83.55	88.75	48.26
CFAM (Zuo et al., 2024)	62.45	83.55	-	49.50
OCDL (Li et al., 2025a)	61.60	82.35	-	49.77
Unsupervised				
IRRA* (Li et al., 2025b)	37.60	60.65	72.30	27.42
BLIP* (Li et al., 2025b)	44.45	67.70	77.25	33.73
GTR (Bai et al., 2023)	45.60	70.35	79.95	33.30
MUMA (Li et al., 2025b)	54.35	76.05	83.65	40.50
Ours (with IRRA)	<u>64.20</u>	<u>83.55</u>	<u>90.30</u>	<u>49.66</u>
Ours (with RDE)	66.35	85.50	91.25	51.51

annotations. Due to the incomplete alignment between initial queries and ground-truth test captions, retrieval without MTI often yields suboptimal results. In contrast, MTI dynamically refines the query through interactive optimization, enabling more accurate and robust ranking performance.

Table 4: Ablation study on the RSTPReid dataset. MTG: Multi-Turn Text Generation, MTI: Multi-Turn Text Interaction, PES: Positional Embedding Stretching.

Method	MTG	MTI	Rank-1	Rank-5	Rank-10	mAP
Ours (with IRRA)	✓		52.30	74.65	84.05	40.03
Ours (with IRRA)		✓	55.50	77.50	86.55	44.87
Ours (with IRRA)	✓	✓	64.20	83.55	90.30	48.03
Ours (with IRRA) (w/o PES)	✓	✓	63.00	82.65	88.80	47.60
Ours (with RDE)	✓		60.55	79.85	86.30	44.98
Ours (with RDE)		✓	62.55	82.85	89.00	46.43
Ours (with RDE)	✓	✓	66.35	85.50	91.25	49.66
Ours (with RDE) (w/o PES)	✓	✓	65.75	84.05	90.60	49.60

5 Conclusion

In this work, we introduced **CTGI** (Chat-Driven Text Generation and Interaction), a unified and annotation-free framework for Text-Based Person Search (TBPS) that removes the dependency on manually crafted textual descriptions. CTGI integrates two synergistic modules: **Multi-Turn Text Generation (MTG)** for training supervision and **Multi-Turn Text Interaction (MTI)** for inference-time refinement. Together, they leverage the expressive capabilities of MLLMs to generate rich pseudo-labels and iteratively enhance user queries via natural language dialogue. Extensive experiments across multiple TBPS benchmarks show that CTGI achieves competitive or superior performance compared to fully supervised methods, while seamlessly adapting to existing retrieval pipelines. Ablation studies and qualitative visu-

alizations further underscore the value of multi-turn interaction and MLLM-guided refinement in improving cross-modal alignment and retrieval robustness.

Limitations

While **CTGI** demonstrates strong performance without manual annotations, several challenges remain. First, pseudo-labels generated by MTG may contain semantic noise or redundancy. Although robust retrieval backbones like RDE are designed for noisy environments and thus benefit more from such supervision, other models without inherent noise-filtering may be more vulnerable to degraded performance. Second, MTI introduces additional inference overhead due to multi-turn interactions with MLLMs. Even with early stopping and anchor validation, this can limit deployment in latency-sensitive applications. Third, both MTG and MTI rely on the generalization ability of the underlying MLLM, which may yield suboptimal results in unfamiliar domains or when handling fine-grained attributes. Future work could address these issues through uncertainty-aware label filtering, more efficient MLLMs, and domain-adaptive interaction strategies.

Acknowledgments

This work was supported by the “Pioneer” and “Leading Goose” R&D Program of Zhejiang under (Grant No. 2025C02110), Public Welfare Research Program of Ningbo under (Grant No. 2024S062), and Yongjiang Talent Project of Ningbo under (Grant No. 2024A-161-G).

References

Mothilal Asokan, Kebin Wu, and Fatima Albreiki. 2025. Finelip: Extending clip’s reach via fine-grained alignment with longer text inputs. *arXiv preprint arXiv:2504.01916*.

Yang Bai, Jingyao Wang, Min Cao, Chen Chen, Ziqiang Cao, Liqiang Nie, and Min Zhang. 2023. Text-based person search without parallel image-text data. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 757–767.

Min Cao, Yang Bai, Ziyin Zeng, Mang Ye, and Min Zhang. 2024. An empirical study of clip for text-based person search.

Dapeng Chen, Hongsheng Li, Xihui Liu, Yantao Shen, Jing Shao, Zejian Yuan, and Xiaogang Wang. 2018. Improving deep visual representation for person re-identification by global and local image-language association. In *Proceedings of the European conference on computer vision (ECCV)*, pages 54–70.

Yuhao Chen, Guoqing Zhang, Yujiang Lu, Zhenxing Wang, and Yuhui Zheng. 2022. Tipcb: A simple but effective part-based convolutional baseline for text-based person search. *Neurocomputing*, 494:171–181.

Xize Cheng, Dongjie Fu, Xiaoda Yang, Minghui Fang, Ruofan Hu, Jingyu Lu, Bai Jionghao, Zehan Wang, Shengpeng Ji, Rongjie Huang, et al. 2025. Omnichat: Enhancing spoken dialogue systems with scalable synthetic data for diverse scenarios. *arXiv preprint arXiv:2501.01384*.

Zefeng Ding, Changxing Ding, Zhiyin Shao, and Dacheng Tao. 2021a. Semantically self-aligned network for text-to-image part-aware person re-identification. *arXiv preprint arXiv:2107.12666*.

Zefeng Ding, Changxing Ding, Zhiyin Shao, and Dacheng Tao. 2021b. Semantically self-aligned network for text-to-image part-aware person re-identification. *Preprint, arXiv:2107.12666*.

Ammarah Farooq, Muhammad Awais, Fei Yan, Josef Kittler, Ali Akbari, and Syed Safwan Khalid. 2020. A convolutional baseline for person re-identification using vision and language descriptions. *arXiv preprint arXiv:2003.00808*.

Dongjie Fu, Xize Cheng, Xiaoda Yang, Wang Hanting, Zhou Zhao, and Tao Jin. 2024. Boosting speech recognition robustness to modality-distortion with contrast-augmented prompts. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 3838–3847.

Takuro Fujii and Shuhei Tarashima. 2023. Bilma: Bidirectional local-matching for text-based person re-identification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2786–2790.

Chenyang Gao, Guanyu Cai, Xinyang Jiang, Feng Zheng, Jun Zhang, Yifei Gong, Pai Peng, Xiaowei Guo, and Xing Sun. 2021. Contextual non-local alignment over full-scale representation for text-based person search. *arXiv preprint arXiv:2101.03036*.

Xiaoxiao Guo, Hui Wu, Yu Cheng, Steven Rennie, Gerald Tesauro, and Rogerio Feris. 2018. Dialog-based interactive image retrieval. In *Advances in Neural Information Processing Systems*, pages 678–688.

Zirun Guo, Minjie Hong, and Tao Jin. 2025a. **Observer1: Unlocking reasoning abilities of mllms with dynamic progressive reinforcement learning.** *Preprint, arXiv:2505.12432*.

Zirun Guo, Shulei Wang, Wang Lin, Weicai Yan, Yangyang Wu, and Tao Jin. 2025b. Efficient prompting for continual adaptation to missing modalities. *arXiv preprint arXiv:2503.00528*.

Xiao Han, Sen He, Li Zhang, and Tao Xiang. 2021. Text-based person search with limited data. *arXiv:2110.10807*.

Shuting He, Hao Luo, Pichao Wang, Fan Wang, Hao Li, and Wei Jiang. 2021. Transreid: Transformer-based object re-identification. In *ICCV*, pages 15013–15022.

Hai Huang, Yan Xia, Shulei Wang, Hanting Wang, Minghui Fang, Shengpeng Ji, Sashuai Zhou, Tao Jin, and Zhou Zhao. 2025. [Open-set cross modal generalization via multimodal unified representation](#). *Preprint*, arXiv:2507.14935.

D. Jiang and M. Ye. 2023a. Cross-modal implicit relation reasoning and aligning for text-to-image person retrieval. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2787–2797.

Ding Jiang and Mang Ye. 2023b. Cross-modal implicit relation reasoning and aligning for text-to-image person retrieval. In *IEEE International Conference on Computer Vision and Pattern Recognition (CVPR)*.

Ding Jiang and Mang Ye. 2023c. Cross-modal implicit relation reasoning and aligning for text-to-image person retrieval. In *CVPR*, pages 2787–2797.

Tao Jin, Weicai Yan, Ye Wang, Sihang Cai, Qifan Shuai, and Zhou Zhao. 2024. Calibrating prompt from history for continual vision-language retrieval and grounding. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 4302–4311.

Ya Jing, Chenyang Si, Junbo Wang, Wei Wang, Liang Wang, and Tieniu Tan. 2020. Pose-guided multi-granularity attention network for text-based person search. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 11189–11196.

Pranavi Kolouju, Eric Xing, Robert Pless, Nathan Jacobs, and Abby Stylianou. 2025. good4cir: Generating detailed synthetic captions for composed image retrieval. *arXiv preprint arXiv:2503.17871*.

Saehyung Lee, Sangwon Yu, Junsung Park, Jihun Yi, and Sungroh Yoon. 2024. Interactive text-to-image retrieval with large language models: A plug-and-play approach. *arXiv preprint arXiv:2406.03411*.

Jie Lei, Xinlei Chen, Ning Zhang, Mengjiao Wang, Mohit Bansal, Tamara L Berg, and Licheng Yu. 2022. Loopitr: Combining dual and cross encoder architectures for image-text retrieval. *arXiv:2203.05465*.

Haiwen Li, Delong Liu, Fei Su, and Zhicheng Zhao. 2025a. Object-centric discriminative learning for text-based person retrieval. In *ICASSP 2025-2025 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5. IEEE.

Shenshen Li, Xing Xu, Yang Yang, Fumin Shen, Yijun Mo, Yujie Li, and Heng Tao Shen. 2023. Dcel: Deep cross-modal evidential learning for text-based person retrieval. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 6292–6300.

Shiping Li, Min Cao, and Min Zhang. 2022. Learning semantic-aligned feature representation for text-based person search. In *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 2724–2728. IEEE.

Shuang Li, Tong Xiao, Hongsheng Li, Bolei Zhou, Dayu Yue, and Xiaogang Wang. 2017a. Person search with natural language description. In *CVPR*, pages 1970–1979.

Shuang Li, Tong Xiao, Hongsheng Li, Bolei Zhou, Dayu Yue, and Xiaogang Wang. 2017b. [Person search with natural language description](#). In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5187–5196.

Zongyi Li, Li Jianbo, Yuxuan Shi, Jiazhong Chen, Shijuan Huang, Linnan Tu, Fei Shen, and Hefei Ling. 2025b. Exploring the potential of large vision-language models for unsupervised text-based person retrieval. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 5119–5127.

Edward Loper and Steven Bird. 2002. Nltk: The natural language toolkit. *arXiv preprint cs/0205028*.

Hao Luo, Youzhi Gu, Xingyu Liao, Shenqi Lai, and Wei Jiang. 2019. Bag of tricks and a strong baseline for deep person re-identification. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, pages 0–0.

Tianle Lv, Shuang Li, Jiaxu Leng, and Xinbo Gao. 2024. Mgrl: Mutual-guidance representation learning for text-to-image person retrieval. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 2895–2899. IEEE.

Yiwei Ma, Xiaoshuai Sun, Jiayi Ji, Guannan Jiang, Weilin Zhuang, and Rongrong Ji. 2023. Beat: Bi-directional one-to-many embedding alignment for text-based person retrieval. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 4157–4168.

Antoine Miech, Jean-Baptiste Alayrac, Ivan Laptev, Josef Sivic, and Andrew Zisserman. 2021. Thinking fast and slow: Efficient text-to-visual retrieval with transformers. In *CVPR*, pages 9826–9836.

OpenAI. 2023. [Gpt-4o](#). Large language model.

Yang Qin, Yingke Chen, Dezhong Peng, Xi Peng, Joey Tianyi Zhou, and Peng Hu. 2024. Noisy-correspondence learning for text-to-image person re-identification. In *IEEE International Conference on Computer Vision and Pattern Recognition (CVPR)*.

Yang Qin, Dezhong Peng, Xi Peng, Xu Wang, and Peng Hu. 2022. Deep evidential learning with noisy correspondence for cross-modal retrieval. In *Proceedings*

of the 30th ACM International Conference on Multi-media, pages 4948–4956.

Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *ICML*, pages 8748–8763. PMLR.

Nikolaos Sarafianos, Xiang Xu, and Ioannis A Kakadiaris. 2019. Adversarial representation learning for text-to-image matching. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 5814–5824.

Zhiyin Shao, Xinyu Zhang, Changxing Ding, Jian Wang, and Jingdong Wang. 2023. Unified pre-training with pseudo texts for text-to-image person re-identification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11174–11184.

Zhiyin Shao, Xinyu Zhang, Meng Fang, Zhifeng Lin, Jian Wang, and Changxing Ding. 2022. Learning granularity-unified representations for text-to-image person re-identification. In *ACM MM*, pages 5566–5574.

Fei Shen, Xiangbo Shu, Xiaoyu Du, and Jinhui Tang. 2023. Pedestrian-specific bipartite-aware similarity learning for text-based person retrieval. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 8922–8931.

Xiujun Shu, Wei Wen, Haoqian Wu, Keyu Chen, Yiran Song, Ruizhi Qiao, Bo Ren, and Xiao Wang. 2022. See finer, see more: Implicit modality alignment for text-based person retrieval. In *European Conference on Computer Vision*, pages 624–641. Springer.

Siqi Sun, Yen-Chun Chen, Linjie Li, Shuohang Wang, Yuwei Fang, and Jingjing Liu. 2021. Lightningdot: Pre-training visual-semantic embeddings for real-time image-text retrieval. In *NAACL-HLT*, pages 982–997.

Wei Suo, Mengyang Sun, Kai Niu, Yiqi Gao, Peng Wang, Yanning Zhang, and Qi Wu. 2022. A simple and robust correlation filtering method for text-based person search. In *ECCV*, pages 726–742. Springer.

Wentan Tan, Changxing Ding, Jiayu Jiang, Fei Wang, Yibing Zhan, and Dapeng Tao. 2024. Harnessing the power of mllms for transferable text-to-image person reid. In *CVPR*, pages 17127–17137.

Haochen Wang, Jiayi Shen, Yongtuo Liu, Yan Gao, and Efstratios Gavves. 2022a. Nformer: Robust person re-identification with neighbor transformer. In *CVPR*, pages 7297–7307.

Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024a. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*.

Zehan Wang, Ziang Zhang, Hang Zhang, Luping Liu, Rongjie Huang, Xize Cheng, Hengshuang Zhao, and Zhou Zhao. 2024b. *Omnibind: Large-scale omni multimodal representation via binding spaces*. *Preprint, arXiv:2407.11895*.

Zhe Wang, Zhiyuan Fang, Jun Wang, and Yezhou Yang. 2020. Vitaa: Visual-textual attributes alignment in person search by natural language. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XII 16*, pages 402–420. Springer.

Zijie Wang, Aichun Zhu, Jingyi Xue, Xili Wan, Chao Liu, Tian Wang, and Yifeng Li. 2022b. Look before you leap: Improving text-based person retrieval by learning a consistent cross-modal common manifold. In *ACM MM*, pages 1984–1992.

Donglai Wei, Sipeng Zhang, Tong Yang, and Jing Liu. 2023. Calibrating cross-modal feature for text-based person searching. *arXiv preprint arXiv:2304.02278*.

Yushuang Wu, Zizheng Yan, Xiaoguang Han, Guanbin Li, Changqing Zou, and Shuguang Cui. 2021. Lapscore: language-guided person search via color reasoning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1624–1633.

Zequan Xie, Haoming Ji, and Lingwei Meng. 2025. Dynamic uncertainty learning with noisy correspondence for text-based person search. *arXiv preprint arXiv:2505.06566*.

Shuanglin Yan, Neng Dong, Jun Liu, Liyan Zhang, and Jinhui Tang. 2023. Learning comprehensive representations with richer self for text-to-image person re-identification. In *Proceedings of the 31st ACM international conference on multimedia*, pages 6202–6211.

Shuanglin Yan, Neng Dong, Liyan Zhang, and Jinhui Tang. 2022a. Clip-driven fine-grained text-image person re-identification. *arXiv:2210.10276*.

Shuanglin Yan, Hao Tang, Liyan Zhang, and Jinhui Tang. 2022b. Image-specific information suppression and implicit local alignment for text-based person search. *arXiv preprint arXiv:2208.14365*.

Shuyu Yang, Yinan Zhou, Yaxiong Wang, Yujiao Wu, Li Zhu, and Zhedong Zheng. 2023. Towards unified text-based person retrieval: A large-scale multi-attribute and language search benchmark. In *Proceedings of the 2023 ACM on Multimedia Conference*.

Xiaohua Zhai, Xiao Wang, Basil Mustafa, Andreas Steiner, Daniel Keysers, Alexander Kolesnikov, and Lucas Beyer. 2022. Lit: Zero-shot transfer with

locked-image text tuning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 18123–18133.

Beichen Zhang, Pan Zhang, Xiaoyi Dong, Yuhang Zang, and Jiaqi Wang. 2024. Long-clip: Unlocking the long-text capability of clip. In *European Conference on Computer Vision*, pages 310–325. Springer.

Ying Zhang and Huchuan Lu. 2018. Deep cross-modal projection learning for image-text matching. In *Proceedings of the European conference on computer vision (ECCV)*, pages 686–701.

Shizhen Zhao, Changxin Gao, Yuanjie Shao, Wei-Shi Zheng, and Nong Sang. 2021. Weakly supervised text-based person re-identification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11395–11404.

Zhedong Zheng, Liang Zheng, Michael Garrett, Yi Yang, Mingliang Xu, and Yi-Dong Shen. 2020. Dual-path convolutional image-text embeddings with instance loss. *ACM Transactions on Multimedia Computing, Communications, and Applications*, 16(2):1–23.

Aichun Zhu, Zijie Wang, Yifeng Li, Xili Wan, Jing Jin, Tian Wang, Fangqiang Hu, and Gang Hua. 2021a. Dssl: Deep surroundings-person separation learning for text-based person retrieval. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 209–217.

Aichun Zhu, Zijie Wang, Yifeng Li, Xili Wan, Jing Jin, Tian Wang, Fangqiang Hu, and Gang Hua. 2021b. **Dssl: Deep surroundings-person separation learning for text-based person retrieval**. In *Proceedings of the 29th ACM International Conference on Multimedia*.

Jialong Zuo, Hanyu Zhou, Ying Nie, Feng Zhang, Tianyu Guo, Nong Sang, Yunhe Wang, and Changxin Gao. 2024. Ufinebench: Towards text-based person retrieval with ultra-fine granularity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22010–22019.