

Separate the Wheat from the Chaff: Winnowing Down Divergent Views in Retrieval Augmented Generation

Song Wang^{*‡}, Zihan Chen^{*‡}, Peng Wang[‡], Zhepei Wei[‡], Zhen Tan[†],

Yu Meng[‡], Cong Shen[‡], Jundong Li[‡]

[‡]University of Virginia, [†]Arizona State University

{sw3wv, zc3dz, pw7nc, zhepei.wei, yumeng5, cong, jundong}@virginia.edu,
ztan36@asu.edu

^{*}Equal contribution

Abstract

Retrieval-augmented generation (RAG) enhances large language models (LLMs) by integrating external knowledge sources to address their limitations in accessing up-to-date or specialized information. A natural strategy to increase the likelihood of retrieving relevant information is to expand the number of retrieved documents. However, involving more documents could introduce significant noise, as many documents may be irrelevant or misleading, thereby reducing the overall accuracy of the generated responses. To overcome the challenge associated with handling a larger number of documents, we propose WinnowRAG, a novel RAG framework designed to systematically filter out noisy documents while preserving valuable content – a process we refer to as **winnowing**. WinnowRAG operates in two stages: In Stage I, we perform **query-aware clustering** to group similar documents and form distinct topic clusters. Each cluster is assigned to an LLM agent for generating a unique answer. In Stage II, we perform winnowing, wherein a critic LLM evaluates the outputs of multiple agents and iteratively separates useful documents from noisy ones. To retain useful documents when discarding agents, we propose two **strategic merging** techniques to ensure that only relevant knowledge is used for generating the final response. Crucially, WinnowRAG is model-agnostic and does not require any model fine-tuning, making it easily adaptable to various tasks. Extensive experiments on various realistic datasets demonstrate the effectiveness of WinnowRAG over state-of-the-art baselines.

1 Introduction

Large language models (LLMs) have achieved significant success in various tasks such as text generation and question answering (Brown et al., 2020; Team et al., 2023; Dubey et al., 2024). While LLMs can store vast amounts of knowledge within

their parameters, they exhibit weakness in specific knowledge-extensive tasks (Yoran et al., 2024). For example, when the input queries demand up-to-date information or out-of-domain knowledge, which is not present in the pre-training corpus (Shuster et al., 2021), LLMs would struggle to provide accurate answers (Zhang et al., 2023; Tan et al., 2025a).

To overcome limitations in handling knowledge-intensive tasks, retrieval-augmented generation (RAG) has been proposed to improve LLMs by integrating external knowledge sources (Asai et al., 2023b; Zhao et al., 2024; Liu et al., 2024a; Chen et al., 2024; Liu et al., 2025a; Wang et al., 2025a, 2024c). Specifically, RAG retrieves relevant documents from external sources and incorporates them into the LLM’s input, in order to help LLMs generate accurate responses in knowledge-intensive tasks (Yu et al., 2023). Consequently, RAG could benefit from the vast and consistently updated knowledge base to provide factual and timely knowledge. RAG frameworks typically retrieve multiple documents to ensure the inclusion of relevant information (Petroni et al., 2021). However, this approach can also introduce irrelevant or incorrect documents, which may hinder the LLM’s ability to extract accurate information (Jiang et al., 2023; Jin et al., 2024).

In practice, retrieving more documents does not necessarily improve the RAG performance. As shown in Fig. 1, increasing the number of retrieved documents raises the probability that the correct information is included – enhancing the recall rate. However, beyond a certain threshold, adding more documents introduces significant noise, which can negatively impact the accuracy of the final answer. This presents the challenge in handling large sets of documents: while involving more documents may have a theoretically higher upper bound of accuracy, it simultaneously introduces greater challenges in processing them effectively. This trade-off explains why most existing approaches limit the number of

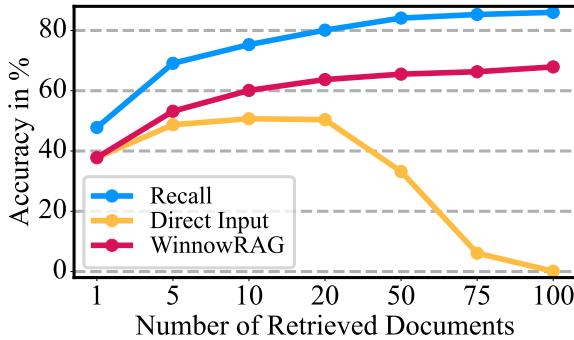


Figure 1: The accuracy results of the recall (i.e., upper bound), direct input, and WinnowRAG on the NaturalQ (Kwiatkowski et al., 2019) dataset with different numbers of retrieved documents.

retrieved documents to fewer than 20 (Wei et al., 2024; Wang et al., 2024e).

In this work, we propose to leverage large sets of retrieved documents by strategically filtering out noisy ones while retaining those that are useful, a process we refer to as **winnowing**. ① To handle a large number of documents, we first introduce **query-aware clustering**, which groups documents based on similar perspectives or information related to the query. This allows us to identify a range of topics within the retrieved documents, enabling filtering at the topic level rather than processing each document individually. This design significantly improves efficiency. Moreover, each cluster is assigned an LLM agent to provide a cluster-specific answer. ② To avoid discarding useful information, we propose a strategic, **merging-based winnowing** approach that filters out noisy documents while selectively retaining relevant ones. In particular, only a subset of documents from each cluster is discarded, allowing us to refine the information extracted from a large document set. Throughout the winnowing process, we employ a critic LLM to evaluate the noisiness of answers generated from document clusters and guide the filtering process. Additionally, WinnowRAG requires no task-specific supervision, relying solely on a multi-agent framework with pretrained LLMs. Without any additional tuning, WinnowRAG can be easily adapted to a wide range of tasks. Our contributions are summarized as follows:

- **Framework:** We introduce WinnowRAG, a novel retrieval-augmented generation framework that clusters documents by topic and progressively filters out irrelevant or noisy documents via LLM agents. This structured filtering en-

hances the quality of retrieved information.

- **Innovation and Adaptability:** WinnowRAG leverages more retrieved documents while minimizing the influence of irrelevant or incorrect content through its filtering (i.e., winnowing) mechanism. Notably, it operates without task-specific supervision, utilizing a multi-agent approach with pretrained LLMs. This eliminates the need for fine-tuning, making it versatile and easily applicable to a wide range of tasks.

- **Experiments and Results:** Results of extensive experiments show that WinnowRAG consistently outperforms existing methods on several knowledge-intensive tasks. These results highlight its effectiveness in managing noisy data and boosting the performance of retrieval-augmented generation.

2 Related Work

Retrieval Augmented Generation. Large language models (LLMs) struggle with domain-specific or knowledge-intensive tasks (Kandpal et al., 2023), often producing "hallucinations" (Zhang et al., 2023) when dealing with queries outside their training data or requiring up-to-date information. Retrieval-Augmented Generation (RAG) addresses this by retrieving relevant documents from external knowledge bases, reducing the risk of generating incorrect content (Lewis et al., 2020; Izacard and Grave, 2020; Asai et al., 2023a; Borgeaud et al., 2022; Guu et al., 2020; Gao et al., 2023; Chen et al., 2025b; Wang et al., 2024b). Recent works have primarily focused on enhancing precision and recall while minimizing irrelevant or toxic outputs that compromise the quality and reliability of responses (Shi et al., 2024; Ma et al., 2023; Jiang et al., 2023; Baek et al., 2023; Xu et al., 2023; Wang et al., 2024d; Tan et al., 2024b, 2025b). Among them, Self-Reflective RAG (Asai et al., 2023b) fine-tunes a general-purpose LLM to generate specific tags for self-reflection. Speculative RAG (Wang et al., 2024e) adopts instruction-tuned LLMs as drafters to offer diverse perspectives while reducing input token counts per draft. Moreover, InstruTRAG (Wei et al., 2024) applies self-synthesized rationales as supervised fine-tuning data to train the model. However, these approaches require prior task-specific knowledge and additional instruction-tuning of LLMs, which is resource-intensive and

limits their adaptability across different domains. In contrast, we harness the potential of LLMs by assigning documents to agents and filtering out irrelevant content within a multi-agent winnowing framework. Our proposed method, WinnowRAG, is highly adaptable across domains without requiring task-specific signals or additional fine-tuning.

LLMs as Critics. Similar to humans, LLMs exhibit the ability to provide natural language feedback or critique (Li et al., 2025; Tan et al., 2024a; Qu et al., 2025), either based on their own internal knowledge (Wang et al., 2023; Zheng et al., 2024; Lei et al., 2025) or by utilizing external tools (Gao et al., 2022; Gou et al., 2023). Previous research has primarily focused on using such critiques to refine and improve the model’s initial outputs on its own (Madaan et al., 2024; Shinn et al., 2024), or in multi-agent frameworks through discussion (Lu et al., 2024; Wang et al., 2024a; Chen et al., 2023, 2025a) and debate (Du et al., 2023; Michael et al., 2023; Xiong et al., 2023; Khan et al., 2024; Subramaniam et al., 2024; Wang et al., 2025b). To the best of our knowledge, RA-ISF (Liu et al., 2024b) has the most similar framework design to ours in the field of RAG by utilizing self-feedback to iteratively filter out irrelevant retrieved documents. However, while RA-ISF focuses on denoising through query decomposition, our method directly filters the initial documents using a multi-agent framework. In our approach, LLM agents are assigned different groups of documents to form various perspectives. During inference time, a critic LLM progressively identifies agents with irrelevant or harmful content, enabling explicit denoising of the retrieved information with natural language feedback and reducing the risk of generating incorrect or misleading outputs.

3 Methodology

In this section, we first formulate the problem setting in Section 3.1 before introducing the proposed framework, WinnowRAG, which effectively filters irrelevant documents without relying on task-specific knowledge. As illustrated in Figure 2, WinnowRAG operates through two stages: query-aware clustering (Stage I) and multi-agent winnowing (Stage II). In Stage I (§ 3.2), the retrieved external documents are clustered into groups based on their perspectives relevant to the query, with each group assigned to an LLM agent. In Stage II (§ 3.3), agents with similar perspectives are merged

to form super-agents, consolidating their respective documents. These super-agents then participate in a multi-round reflection process, called winnowing, where a critic LLM provides feedback to refine the results while filtering out irrelevant information. During each round, the critic LLM evaluates the agents’ responses. Agents that are producing misleading outputs, from the critic LLM’s perspective, will be merged with the remaining agents. A key challenge in both merging processes is to balance the inclusion of relevant documents while eliminating noise. To address this, we leverage the embedding space and design two merging methods, as detailed in Section 3.4.

3.1 Problem Formulation

We follow the standard RAG setting (Wei et al., 2024; Asai et al., 2023b), where each task \mathcal{T} consists of a triple $(\mathcal{Q}, \mathcal{A}, \mathcal{D})$. Given a question-answer pair $(q, a) \in (\mathcal{Q}, \mathcal{A})$, a retriever \mathcal{R} retrieves supporting documents $\mathcal{D}_{\mathcal{R}} \subseteq \mathcal{D}$ from the external knowledge base \mathcal{D} . We aim to filter out noisy documents in $\mathcal{D}_{\mathcal{R}}$ such that the LLM can better generate the response a' containing the correct answer based on the retrieved external knowledge, i.e., to maximize $\mathbb{E}_{(q,a)} \mathcal{M}(a, a')$, where \mathcal{M} represents a specific evaluation metric, e.g., *accuracy*.

3.2 Stage I: Query-Aware Clustering

In this section, we provide a detailed explanation of the query-aware document clustering process. The key motivation is that the external documents often contain diverse and noisy content (Wang et al., 2024e). By clustering the documents based on their relevance to the query, each group will have a more consistent perspective regarding the query. This enables each LLM agent to provide relatively consistent answers when using a specific group of documents as input. Specifically, we first cluster the retrieved documents into groups using query-aware embeddings and the *K*-Means clustering algorithm (Anderberg, 2014).

To ensure documents with similar perspectives on a query are grouped together, given a query q and a set of retrieved documents $\mathcal{D}_{\mathcal{R}} = \{d_1, d_2, \dots, d_N\}$ from the external database, we encode each document alongside the query using a structured prompt. This representation is then processed using the *K*-Means algorithm to group documents with related viewpoints. The clustering

is performed as follows:

$$\begin{aligned}
\text{emb}(d_i) &= f(\text{Prompt}(q \oplus d_i)), i = 1, 2, \dots, N \\
&\quad \{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_K\} \\
&= \text{K-Means}(\text{emb}(d_1), \text{emb}(d_2), \dots, \text{emb}(d_N)).
\end{aligned} \tag{1}$$

Here $f(\cdot)$ represents the text embedding model (e.g., Sentence-BERT (Reimers, 2019)); $\text{emb}(d_i)$ is the query-aware embedding for the document d_i ; \mathcal{D}_j is a cluster of documents with similar contents; K is a hyper-parameter that controls the number of clusters. We then assign each document group \mathcal{D}_j to an LLM agent $A_j \in \{A_1, A_2, \dots, A_K\}$, which is a general pretrained LLM. At this stage, we typically use a relatively large value of K (e.g., $K = 10$) to ensure that different clusters contain divergent views. Agents assigned to a noisy cluster will produce responses that deviate from the correct answer, making it easier to identify and eliminate them in the subsequent winnowing stage.

3.3 Stage II: Multi-Agent Winnowing

▷ **Super-Agent Initialization.** To remove redundant agents and reduce further winnowing rounds for efficiency, we first query the agents from Stage I to provide answers to the query based on their assigned documents (prompt provided in Appendix D.1). Next, we introduce a critic LLM, which is a pretrained language model, to summarize the distinct responses from them *without* making judgments (prompt provided in Appendix D.3). We then merge any pair of agents with similar answers into a super-agent. When merging, our goal is for the super-agent to retain documents that adequately represent the perspectives of both original agents. To achieve this, we operate in the embedding space and propose the **Ellipse Merging** strategy. Intuitively, when two agents arrive at similar conclusions, their document embeddings should be closer. We define an ellipse in the embedding space, with its foci close to the centroids of the two agents' document embeddings, and select the documents within the ellipse as documents for the super-agent. In Section 3.4, we introduce the ellipse merging process in detail.

▷ **Multi-Agent Winnowing.** After the super-agent initialization process, we have K' super-agents $\mathcal{A}' = \{A'_1, A'_2, \dots, A'_{K'}\}$, where K' is the number of distinct responses determined by the critic LLM and $K' \leq K$. Each super-agent A'_j now has a different perspective from others to the

query. We then propose the multi-agent winnowing stage to harness the critic LLM's ability to identify potential errors in the super-agents' outputs, thereby producing more consistent and precise answers.

In multi-agent winnowing, we perform maximally M rounds of winnowing. During each round of winnowing, the super-agents act in parallel, each presenting an argument based on the critic LLM's feedback (from the previous round) and its current documents. To provide enough supportive information to the critic LLM to make decisions, each argument includes three components: (a) *evidence*, extracted from the documents of that agent, (b) *rationale*, explaining how the evidence supports the conclusion, and (c) the *final answer*. The detailed prompt is provided in Appendix D.2. The critic LLM oversees and manages the entire winnowing process by taking one of the following actions: (a) concluding the winnowing and obtaining the final answer a' , or (b) continuing the winnowing by identifying incorrect super-agents, denoted as \mathcal{A}'_{inc} . If the winnowing process concludes, the critic LLM will output the final answer a' . If the critic LLM decides to continue, each super-agent A'_j in \mathcal{A}'_{inc} is merged with the closest remaining agent A'_i , i.e.,

$$A'_i = \underset{A'_k \in \mathcal{A}' \setminus \mathcal{A}'_{inc}}{\operatorname{argmin}} |\mu'_i - \mu'_k|, \tag{2}$$

where μ'_k is the centroid of the super-agent A'_k 's document embeddings.

When merging the incorrect super-agent A'_j with a remaining agent A'_i , our goal is to retain helpful documents from A'_j 's documents while preventing noisy ones from being assigned to A'_i for the next round of winnowing. To achieve this, we propose the **Hyperbola Merging** strategy. Specifically, we define a hyperbola in the embedding space, using the foci close to the centroids of the two super-agents' document embeddings, μ'_i and μ'_j . Document embeddings that fall on the opposite side of the hyperbola relative to μ'_j will have a smaller distance to μ'_i by a fixed threshold. Assigning these documents to A'_i for the next round of winnowing ensures a more specialized and complementary merging process while explicitly filtering out noisy documents. We describe this hyperbola merging process in detail in Section 3.4.

After each round, the rationales provided by the critic LLM will be handed over to each remaining super-agent (detailed prompt in Appendix D.4).

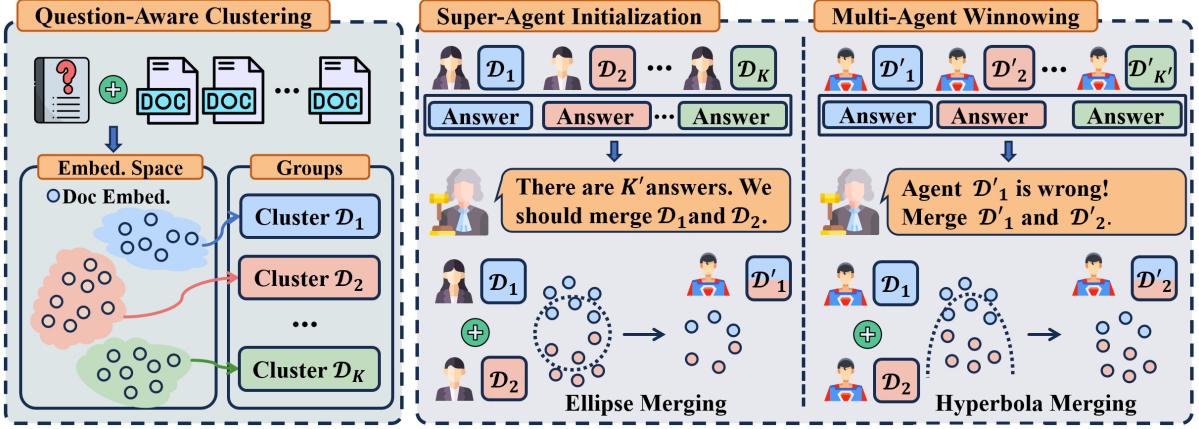


Figure 2: The overall process of our WinnowRAG framework. We first perform query-aware clustering to group documents with similar semantic meanings with respect to the query. In Stage II, we first perform agent initialization to form multiple super-agents that will be used in the following winnowing steps. During multi-agent winnowing, we gradually discard agents with incorrect answers, guided by the critic LLM, while retaining useful documents.

Notably, this enables the super-agents to incorporate feedback from the previous round and generate improved responses in the subsequent round.

3.4 Merging Strategies

Stage II involves two types of agent merging processes. During the initialization of super-agents, we focus on merging agents with similar views, while in the winnowing process, incorrect super-agents are merged into the remaining ones. Both processes require balancing the inclusion of relevant documents with the elimination of noise. To address this challenge, we propose two merging strategies in the embedding space.

▷ **Ellipse Merging.** This strategy is used to merge agents with similar answers in the super-agent initialization step. We denote the K agents as $\{A_1, A_2, \dots, A_K\}$, and their corresponding documents as $\{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_K\}$.

Suppose that the answer of agent A_i is sufficiently similar to that of A_j , decided by the critic LLM. We aim to merge these two agents by merging the documents of these two agents, i.e., \mathcal{D}_i and \mathcal{D}_j . Intuitively, since these two agents bear similar answers, their documents should also bear similar meanings. Therefore, to retain the documents that are mostly helpful, we propose to select documents that are close to both clusters. As such, we define the set of merged documents, $\mathcal{D}_{i,j}$, based on their distances to the centroids of cluster \mathcal{D}_i and \mathcal{D}_j as

$$\begin{aligned} \mathcal{D}_{i,j} &= \{x \mid d_{A_i}(x) + d_{A_j}(x) \leq T_{ij}, \\ &\quad x \in \mathcal{D}_i \cup \mathcal{D}_j\}, \\ T_{ij} &= \frac{1}{|\mathcal{D}_i| + |\mathcal{D}_j|} \sum_{x \in \mathcal{D}_i \cup \mathcal{D}_j} (d_{A_i}(x) + d_{A_j}(x)), \\ d_{A_i}(x) &= \|\text{emb}(x) - \mu_i\|_2. \end{aligned} \quad (3)$$

Here μ_i is the centroid of the i -th cluster, i.e., $\mu_i = \frac{1}{|\mathcal{D}_i|} \sum_{x \in \mathcal{D}_i} \text{emb}(x)$. In the above equation, we set a threshold T_{ij} , such that the documents with a summed distance to centroids μ_i and μ_j less than T_{ij} are included in the merged set. As a result, the documents that are included in this defined ellipse will be kept during merging. To determine the value of the threshold T_{ij} , we resort to selecting the summed distance to both centroids, averaged across documents in the two clusters. This describes the average summed distance of any document to both centroids. Thus, documents with a summed distance less than T_{ij} are more likely to be close to both clusters.

▷ **Hyperbola Merging.** At the end of each winnowing round, we aim to merge the documents of two agents, one of which is considered incorrect by the critic LLM. Rather than selecting documents that are close to both clusters, as in Ellipse Merging, we now select documents that are close to the potentially correct agent while sufficiently far from the other. This strategy helps in identifying documents that are more likely to be helpful but clustered into the incorrect agent.

Suppose that super-agent A_i is considered potentially correct, and another super-agent A_j is consid-

ered incorrect. We aim to merge their documents in a way that emphasizes documents that are close to A_i but distant from A_j . Nevertheless, even though A_j provides a wrong answer, the documents in \mathcal{D}_j may still be useful for reasoning of subsequent steps. Therefore, we aim to keep most documents of agent A_i while only keeping the documents of A_j that are close to A_i . Therefore, we propose the merging conditions as follows:

$$\begin{cases} d_{A_i}(x) < T_i, \\ d_{A_j}(x) > T_j, \end{cases} \quad (4)$$

where $d_{A_i}(x) = \|\text{emb}(x) - \mu_i\|_2$ and $d_{A_j}(x) = \|\text{emb}(x) - \mu_j\|_2$ represent the distances of a document x to the centroids of the clusters associated with agents A_i and A_j , respectively. The value T_i is selected as a threshold below which documents are considered close to the centroid of agent A_i , while T_j is the threshold above which documents are considered distant from agent A_j . Combining the merging conditions, the set of merged documents, $\mathcal{D}_{i,j}$, is achieved as follows:

$$\begin{aligned} \mathcal{D}_{i,j} &= \{x \mid d_{A_j}(x) - d_{A_i}(x) > T_j - T_i, \\ &\quad x \in \mathcal{D}_i \cup \mathcal{D}_j\}, \\ T_i &= \frac{1}{|\mathcal{D}_i| + |\mathcal{D}_j|} \sum_{x \in \mathcal{D}_i \cup \mathcal{D}_j} d_{A_i}(x), \\ T_j &= \frac{1}{|\mathcal{D}_i| + |\mathcal{D}_j|} \sum_{x \in \mathcal{D}_i \cup \mathcal{D}_j} d_{A_j}(x). \end{aligned} \quad (5)$$

Therefore, remained documents are included in a hyperbola defined by the above equation. This merging strategy helps in identifying and merging documents that are primarily relevant to agent A_i but distant from agent A_j , allowing for a focused merging of contrasting perspectives (of A_i and A_j). By applying this hyperbola-based merging criterion, we highlight documents that contribute to divergent views, ensuring a more specialized and complementary merging process.

4 Experiments

4.1 Inference Details

Our experiments are all conducted on four Nvidia A100 GPUs, each with 80GB of memory. To facilitate the inference process, we utilize the vLLM package (Kwon et al., 2023). Greedy decoding is applied for inference. We set $K = 10$ for our framework and the maximum token length for all models as 4096. For the critic

LLM, we use the same model as the agents. For ICL and InstructRAG-ICL, we follow InstructRAG and set the number of demonstrations as 2. Our code is provided at <https://github.com/SongWSW/WinnowRAG>. The details of datasets and baselines are provided in Appendix A.

4.2 Comparative Results

In this subsection, we study the comparative results of our framework and other state-of-the-art RAG methods with and without training (or fine-tuning). Particularly, we present the results for RAG baselines without training using Llama-3-Instruct-8B and Llama-3-Instruct-70B. For RAG methods with training, we consider Llama-3-Instruct-8B, as the fine-tuning results on Llama-3-Instruct-70B are difficult to obtain and not reported in existing works. The results are presented in Table 1. Comparing the results of RAG baselines without training, we can observe that **❶ Parameter Size Matters**. All methods present better results with a larger model parameter size, which increases from 8B to 70B. This demonstrates that when not fine-tuned, a larger LM could potentially provide better reasoning capability to utilize the retrieved documents for answering. Notably, WinnowRAG achieves superior performance even with the smaller model Llama-3-Instruct-8B. This indicates that WinnowRAG does not require powerful LLMs to function, thereby leading to better practicability. **❷ Retrieval Helps**. In-context RALM, ICL, and InstructRAG-ICL generally outperform the zero-shot prompting method, which does not involve any retrieval. This indicates that for such open-domain question-answering tasks, the involvement of retrieved documents is crucial. **❸ Outstanding Performance**. Our framework consistently outperforms all other training-free baselines across various datasets. Particularly, WinnowRAG is particularly superior on datasets PopQA and NQ with lower Recall@20 in comparison to TriviaQA and ASQA. This demonstrates WinnowRAG’s ability to effectively filter and refine retrieved documents, even in scenarios where the correct information may be distributed across multiple noisy sources.

❹ Model-Agnostic Capabilities. One of the key insights from these experiments is the model-agnostic nature of WinnowRAG. Despite the use of smaller models like Llama-3-8B-Instruct, our framework demonstrates the ability to achieve better performance compared to larger fine-tuned models on four datasets. This adaptability makes Win-

Table 1: The overall results of our framework and baselines on five downstream tasks with and without fine-tuning the LM. The best performance is shown in **bold**. “–” denotes that the results are not reported in the original work or are not applicable. We report the *accuracy* for datasets NQ, TriviaQA, PopAQ, and MHQA, and report the *exact match* for dataset ASQA. “8B”, and “70B” represent Llama-3-8B-Instruct, and Llama-3-70B-Instruct, respectively.

Dataset	PopQA		TriviaQA		NQ		MHQA		ASQA	
	8B	70B								
Zero-shot Prompting	22.8	28.9	69.4	80.6	46.6	57.9	45.6	57.5	30.6	39.1
In-Context RALM	62.3	63.8	71.4	76.3	56.8	60.2	43.4	51.2	40.0	43.1
ICL	63.1	63.9	74.2	79.1	60.1	62.9	45.3	53.9	42.6	45.4
InstructRAG-ICL	64.2	65.5	76.8	81.2	62.1	66.5	50.4	57.3	44.7	47.8
WinnowRAG	68.1	68.8	79.3	81.6	66.8	68.3	56.3	58.4	47.9	48.5
Llama w/ Fine-tune	8B	70B								
SFT	61.0	–	73.9	–	56.6	–	56.1	–	43.8	–
Self-RAG	55.8	–	71.4	–	42.8	–	32.9	–	36.9	–
RetRobust	56.5	–	71.5	–	54.2	–	54.7	–	40.5	–
InstructRAG-FT	66.2	–	78.5	–	65.7	–	57.2	–	47.6	–

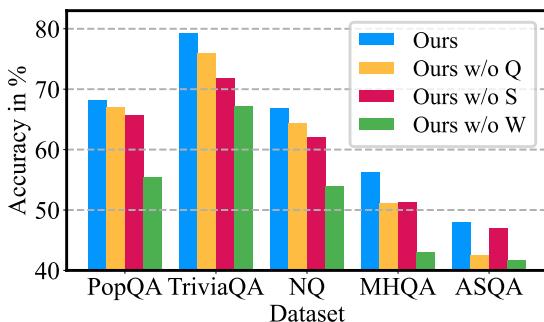


Figure 3: The ablation study results of WinnowRAG on five datasets.

nowRAG, a training-free framework, highly practical for deployment in scenarios where computational resources are limited, or where large-scale fine-tuning is not feasible. The fact that WinnowRAG achieves superior results without requiring task-specific training further underscores its flexibility and broad applicability.

4.3 Ablation Study

In this subsection, we conduct experiments while removing specific modules of our framework to separately study their effects on the performance. Particularly, we consider the following variants of our frameworks: ① We remove the query-aware clustering during Stage I and replace it with random splitting. We refer to this variant as WinnowRAG\Q. ② We remove the strategic merging techniques during Stage II. In this variant, when merging agents with the same answers, we randomly keep half of the documents of both agents and combine them into one agent. When merging agents with different answers, we directly discard all documents of the

agent with a wrong answer. We refer to this variant as WinnowRAG\S. ③ We remove the entire multi-agent winnowing module, i.e., Stage II, and directly select one answer from responses of all clusters using the critic LLM. We refer to this variant as WinnowRAG\W. From the results presented in Fig. 3, we can obtain the following observations: ① **WinnowRAG\Q results in a moderate drop in performance.** This can be attributed to the loss of grouping based on document content, which undermines the framework’s ability to effectively cluster related information. Random splitting leads to a less coherent selection of documents, increasing the noise in agent responses and reducing the critic’s ability to accurately assess the outcome of each cluster. ② **WinnowRAG\S shows that the strategic merging techniques are critical**, particularly in datasets with a high recall rate like NQ and TriviaQA. Without merging strategies, the framework struggles to retain useful documents. Randomly discarding documents or entirely removing those from agents introduces more noise and leads to suboptimal performance, as relevant information may be inadvertently lost. ③ **WinnowRAG\W, results in the largest performance drop.** This suggests that the multi-agent winnowing process plays a fundamental role in our framework. The absence of iterative winnowing leads to a lack of thorough evaluation of the agents’ responses, and the critic LLM alone is insufficient to make optimal selections from a large set of noisy or conflicting responses. This variant highlights how crucial multi-agent winnowing is in ensuring that only the most relevant and accurate documents contribute to the final answer.

Table 2: Performance of WinnowRAG with different rounds of winnowing.

Dataset	PopQA	TriviaQA	NQ	MHQQA	ASQA
$M = 1$	62.5	74.2	60.3	50.1	43.2
$M = 2$	65.7	78.9	63.4	53.2	44.9
$M = 3$	68.1	79.3	66.8	56.3	47.9
$M = 4$	69.2	79.5	67.4	57.0	47.7
$M = 5$	68.5	79.4	67.2	56.8	46.8

4.4 Parameter Sensitivity

In this subsection, we explore the sensitivity of our proposed framework WinnowRAG to several key parameters.

Rounds of Winnowing. An essential aspect of our framework is the number of winnowing rounds used in the multi-agent winnowing process. During each round, super-agents engage in a structured discussion, iteratively refining their responses and converging towards the most accurate answer, with noisy or incorrect agents gradually being filtered out. To understand the sensitivity of performance to the number of winnowing rounds, we conduct experiments where the winnowing process was terminated at different rounds, observing the effects on the final output. From the results presented in Table 2, we can observe several trends: **① Early stopping yields suboptimal results.** Terminating the winnowing process after just 1 or 2 rounds leads to suboptimal answers. This is because the early rounds of winnowing often do not provide sufficient time for the agents to fully resolve conflicts or eliminate noisy contributions. In these early rounds, agents may still involve irrelevant documents, which hinders the ability of the critic LLM to derive a well-informed final answer. **② More rounds may not always help.** While additional rounds of winnowing help improve the accuracy by progressively refining the answers, our results show that after a certain threshold, further iterations lead to decreasing performance. Beyond this point, the performance slightly degrades. This decline can be attributed to the unnecessary complexity introduced by excessively extending the winnowing process. As the winnowing continues, the growing complexity can make it more difficult for the critic LLM to track critical information. Misinterpretations or misunderstandings may occur, leading to degraded decision-making or incorrect conclusions. **③ Optimal numbers of rounds may differ.** The results suggest that there is an optimal number of winnowing rounds where the balance between re-

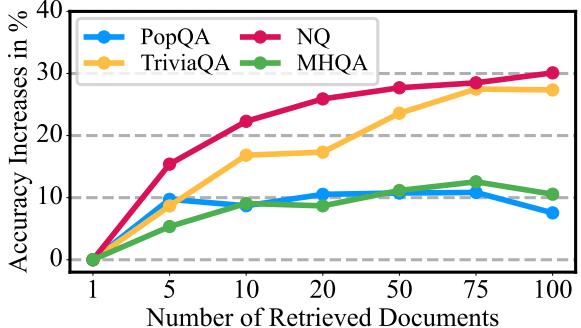


Figure 4: The accuracy improvement (over using one retrieved document) results of WinnowRAG with different numbers of retrieved documents.

finement and complexity is achieved. In this case, the framework has effectively filtered out noisy agents and converged on the most relevant information without incurring the risks of filtering out useful documents. Notably, determining this optimal number is task-dependent. For example, the performance on dataset TriviaQA stabilizes earlier, due to its simplicity, while other datasets generally require more rounds.

Number of Retrieved Documents. The number of documents retrieved for each query is critical, as more documents can provide additional relevant information but may also introduce noise. In Fig. 4, we present the results by varying the number of retrieved documents. We observe that: **①** Retrieving fewer documents (e.g., 10 or fewer) may result in the model missing important information, as the necessary knowledge for answering the question may not be sufficiently covered. This could lead to a lower accuracy due to insufficient evidence available to the agents. **②** Increasing the number of retrieved documents can improve the quality of the answer by providing a richer knowledge source and increasing the chances of capturing relevant information. However, retrieving too many documents could overwhelm the system with irrelevant information, introducing more noise and potentially harming the performance. Nevertheless, our framework exhibits improved performance, demonstrating the robustness of our design against noise.

5 Conclusion

In this work, we propose WinnowRAG, a novel training-free framework that effectively addresses the inherent challenges of utilizing a large number of retrieved documents in RAG systems. Specifically, with our designed stages of query-aware clus-

tering and multi-agent winnowing, WinnowRAG manages to filter out noisy information in retrieved documents while retaining useful documents. As a result, WinnowRAG enhances the accuracy and relevance of generated responses without necessitating model-specific fine-tuning. The strong performance exhibited in experiments underscores its potential as a robust approach for integrating external knowledge into language models, providing insights for more reliable and contextual knowledge-intensive applications in various domains.

6 Limitations

One challenge lies in its reliance on a critic LLM for filtering noisy information, which can introduce computational overhead when processing large-scale datasets or a high volume of documents. Additionally, while WinnowRAG avoids task-specific supervision, its effectiveness still depends on the quality and relevance of the retrieved documents, meaning that subpar retrieval mechanisms could limit its performance. Furthermore, the clustering and filtering processes may inadvertently discard subtle but relevant information in edge cases, leading to potential gaps in the generated responses. Lastly, the framework’s dependence on pretrained LLMs means it may inherit biases or inaccuracies present in the underlying models, potentially affecting the final output quality.

7 Ethics Statement

WinnowRAG operates at the intersection of AI and external knowledge utilization, raising important ethical considerations. By incorporating large-scale retrieval systems, the framework must navigate issues of data privacy, ensuring that sensitive or proprietary information is not misused or exposed during retrieval or processing. Additionally, the reliance on pretrained LLMs introduces the risk of propagating biases present in the training data, potentially leading to unfair or harmful outputs. We are committed to advancing ethical AI practices by continuously evaluating and refining WinnowRAG’s design to align with fairness, transparency, and sustainability principles.

Acknowledgements

This work is supported in part by the National Science Foundation under grants (IIS-2006844, IIS-2144209, IIS-2223769, CNS-2154962, BCS-2228534, and CMMI2411248), the Common-

wealth Cyber Initiative Awards under grants (VV-1Q24-011, VV-1Q25-004), and the research gift funding from Netflix and Snap.

References

Michael R Anderberg. 2014. *Cluster analysis for applications: probability and mathematical statistics: a series of monographs and textbooks*, volume 19. Academic press.

Akari Asai, Sewon Min, Zexuan Zhong, and Danqi Chen. 2023a. Retrieval-based language models and applications. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 6: Tutorial Abstracts)*, pages 41–46.

Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2023b. Self-rag: Learning to retrieve, generate, and critique through self-reflection. *arXiv preprint arXiv:2310.11511*.

Jinheon Baek, Soyeong Jeong, Minki Kang, Jong C Park, and Sung Ju Hwang. 2023. Knowledge-augmented language model verification. *arXiv preprint arXiv:2310.12836*.

Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Milligan, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. 2022. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.

Justin Chih-Yao Chen, Swarnadeep Saha, and Mohit Bansal. 2023. Reconcile: Round-table conference improves reasoning via consensus among diverse llms. *arXiv preprint arXiv:2309.13007*.

Zihan Chen, Song Wang, Cong Shen, and Jundong Li. 2024. Fastgas: Fast graph-based annotation selection for in-context learning. In *Findings of the Association for Computational Linguistics ACL 2024*, pages 9764–9780.

Zihan Chen, Song Wang, Zhen Tan, Xingbo Fu, Zhenyu Lei, Peng Wang, Huan Liu, Cong Shen, and Jundong Li. 2025a. A survey of scaling in large language model reasoning. *arXiv preprint arXiv:2504.02181*.

Zihan Chen, Song Wang, Zhen Tan, Jundong Li, and Cong Shen. 2025b. Maple: Many-shot adaptive pseudo-labeling for in-context learning. *arXiv preprint arXiv:2505.16225*.

Yilun Du, Shuang Li, Antonio Torralba, Joshua B Tenenbaum, and Igor Mordatch. 2023. Improving factuality and reasoning in language models through multiagent debate. *arXiv preprint arXiv:2305.14325*.

Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Luyu Gao, Zhuyun Dai, Panupong Pasupat, Anthony Chen, Arun Tejasvi Chaganty, Yicheng Fan, Vincent Y Zhao, Ni Lao, Hongrae Lee, Da-Cheng Juan, et al. 2022. Rarr: Researching and revising what language models say, using language models. *arXiv preprint arXiv:2210.08726*.

Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, and Haofen Wang. 2023. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*.

Zhibin Gou, Zhihong Shao, Yeyun Gong, Yelong Shen, Yujiu Yang, Nan Duan, and Weizhu Chen. 2023. Critic: Large language models can self-correct with tool-interactive critiquing. *arXiv preprint arXiv:2305.11738*.

Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Mingwei Chang. 2020. Retrieval augmented language model pre-training. In *International conference on machine learning*, pages 3929–3938. PMLR.

Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. 2020. Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6609–6625.

Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2021. Unsupervised dense information retrieval with contrastive learning. *arXiv preprint arXiv:2112.09118*.

Gautier Izacard and Edouard Grave. 2020. Leveraging passage retrieval with generative models for open domain question answering. *arXiv preprint arXiv:2007.01282*.

Zhengbao Jiang, Frank F Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. Active retrieval augmented generation. *arXiv preprint arXiv:2305.06983*.

Chao Jin, Zili Zhang, Xuanlin Jiang, Fangyue Liu, Xin Liu, Xuanzhe Liu, and Xin Jin. 2024. Ragcache: Efficient knowledge caching for retrieval-augmented generation. *arXiv preprint arXiv:2404.12457*.

Mandar Joshi, Eunsol Choi, Daniel S Weld, and Luke Zettlemoyer. 2017. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1601–1611.

Nikhil Kandpal, Haikang Deng, Adam Roberts, Eric Wallace, and Colin Raffel. 2023. Large language models struggle to learn long-tail knowledge. In *International Conference on Machine Learning*, pages 15696–15707. PMLR.

Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781.

Akbir Khan, John Hughes, Dan Valentine, Laura Ruis, Kshitij Sachan, Ansh Radhakrishnan, Edward Grefenstette, Samuel R Bowman, Tim Rocktäschel, and Ethan Perez. 2024. Debating with more persuasive llms leads to more truthful answers. *arXiv preprint arXiv:2402.06782*.

Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. 2019. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:453–466.

Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. 2023. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the 29th Symposium on Operating Systems Principles*, pages 611–626.

Zhenyu Lei, Zhen Tan, Song Wang, Yaochen Zhu, Zihan Chen, Yushun Dong, and Jundong Li. 2025. Learning from diverse reasoning paths with routing and collaboration. *arXiv preprint arXiv:2508.16861*.

Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Kütter, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474.

Dawei Li, Bohan Jiang, Liangjie Huang, Alimohammad Beigi, Chengshuai Zhao, Zhen Tan, Amrita Bhattacharjee, Yuxuan Jiang, Canyu Chen, Tianhao Wu, et al. 2025. From generation to judgment: Opportunities and challenges of llm-as-a-judge, 2025. URL <https://arxiv.org/abs/2411.16594>.

Jimmy Lin, Xueguang Ma, Sheng-Chieh Lin, Jheng-Hong Yang, Ronak Pradeep, and Rodrigo Nogueira. 2021. Pyserini: An easy-to-use python toolkit to support replicable ir research with sparse and dense representations. *arXiv preprint arXiv:2102.10073*.

Haochen Liu, Song Wang, Chen Chen, and Jundong Li. 2025a. Question-aware knowledge graph prompting for enhancing large language models. *arXiv preprint arXiv:2503.23523*.

Haochen Liu, Song Wang, Yaochen Zhu, Yushun Dong, and Jundong Li. 2024a. Knowledge graph-enhanced large language models via path selection. In *Findings of the Association for Computational Linguistics ACL 2024*, pages 6311–6321.

Qi Liu, Bo Wang, Nan Wang, and Jiaxin Mao. 2025b. Leveraging passage embeddings for efficient listwise reranking with large language models. In *Proceedings of the ACM on Web Conference 2025*, pages 4274–4283.

Yanming Liu, Xinyue Peng, Xuhong Zhang, Weihao Liu, Jianwei Yin, Jiannan Cao, and Tianyu Du. 2024b. Ra-isf: Learning to answer and understand from retrieval augmentation via iterative self-feedback. *arXiv preprint arXiv:2403.06840*.

Li-Chun Lu, Shou-Jen Chen, Tsung-Min Pai, Chan-Hung Yu, Hung-yi Lee, and Shao-Hua Sun. 2024. Llm discussion: Enhancing the creativity of large language models via discussion framework and role-play. *arXiv preprint arXiv:2405.06373*.

Xinbei Ma, Yeyun Gong, Pengcheng He, Hai Zhao, and Nan Duan. 2023. Query rewriting for retrieval-augmented large language models. *arXiv preprint arXiv:2305.14283*.

Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, et al. 2024. Self-refine: Iterative refinement with self-feedback. *Advances in Neural Information Processing Systems*, 36.

Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. 2023. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9802–9822.

Julian Michael, Salsabila Mahdi, David Rein, Jackson Petty, Julien Dirani, Vishakh Padmakumar, and Samuel R Bowman. 2023. Debate helps supervise unreliable experts. *arXiv preprint arXiv:2311.08702*.

Jianmo Ni, Chen Qu, Jing Lu, Zhuyun Dai, Gustavo Hernandez Abrego, Ji Ma, Vincent Zhao, Yi Luan, Keith Hall, Ming-Wei Chang, et al. 2022. Large dual encoders are generalizable retrievers. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 9844–9855.

F Petroni, A Piktus, A Fan, PSH Lewis, M Yazdani, ND Cao, J Thorne, Y Jernite, V Karpukhin, J Maillard, et al. 2021. Kilt: a benchmark for knowledge intensive language tasks. In *NAACL-HLT*, pages 2523–2544. Association for Computational Linguistics.

Huaizhi Qu, Inyoung Choi, Zhen Tan, Song Wang, Sukwon Yun, Qi Long, Faizan Siddiqui, Kwonjoon Lee, and Tianlong Chen. 2025. Efficient map estimation of llm judgment performance with prior transfer. *arXiv preprint arXiv:2504.12589*.

Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. 2023. In-context retrieval-augmented language models. *Transactions of the Association for Computational Linguistics*, 11:1316–1331.

N Reimers. 2019. Sentence-bert: Sentence embeddings using siamese bert-networks. *arXiv preprint arXiv:1908.10084*.

Stephen E Robertson and Steve Walker. 1994. Some simple effective approximations to the 2-poisson model for probabilistic weighted retrieval. In *SIGIR’94: Proceedings of the Seventeenth Annual International ACM-SIGIR Conference on Research and Development in Information Retrieval, organised by Dublin City University*, pages 232–241. Springer.

Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2024. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36.

Yunxiao Shi, Xing Zi, Zijing Shi, Haimin Zhang, Qiang Wu, and Min Xu. 2024. Eragent: Enhancing retrieval-augmented language models with improved accuracy, efficiency, and personalization. *arXiv preprint arXiv:2405.06683*.

Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. 2024. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36.

Kurt Shuster, Spencer Poff, Moya Chen, Douwe Kiela, and Jason Weston. 2021. Retrieval augmentation reduces hallucination in conversation. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 3784–3803.

Ivan Stelmakh, Yi Luan, Bhuwan Dhingra, and Ming-Wei Chang. 2022. Asqa: Factoid questions meet long-form answers. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 8273–8288.

Vighnesh Subramaniam, Antonio Torralba, and Shuang Li. 2024. Debategpt: Fine-tuning large language models with multi-agent debate supervision.

Zhen Tan, Dawei Li, Song Wang, Alimohammad Beigi, Bohan Jiang, Amrita Bhattacharjee, Mansooreh Karami, Jundong Li, Lu Cheng, and Huan Liu. 2024a. Large language models for data annotation and synthesis: A survey. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 930–957.

Zhen Tan, Jie Peng, Song Wang, Lijie Hu, Tianlong Chen, and Huan Liu. 2025a. Tuning-free accountable intervention for llm deployment—a metacognitive approach. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 25237–25245.

Zhen Tan, Jun Yan, I Hsu, Rujun Han, Zifeng Wang, Long T Le, Yiwen Song, Yanfei Chen, Hamid Palangi, George Lee, et al. 2025b. In prospect and retrospect: Reflective memory management for long-term personalized dialogue agents. *arXiv preprint arXiv:2503.08026*.

Zhen Tan, Chengshuai Zhao, Raha Moraffah, Yifan Li, Song Wang, Jundong Li, Tianlong Chen, and Huan Liu. 2024b. "glue pizza and eat rocks"—exploiting vulnerabilities in retrieval-augmented generative models. *arXiv preprint arXiv:2406.19417*.

Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. 2023. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*.

Qineng Wang, Zihao Wang, Ying Su, Hanghang Tong, and Yangqiu Song. 2024a. Rethinking the bounds of llm reasoning: Are multi-agent discussions the key? *arXiv preprint arXiv:2402.18272*.

Song Wang, Zihan Chen, Chengshuai Shi, Cong Shen, and Jundong Li. 2024b. Mixture of demonstrations for in-context learning. *Advances in Neural Information Processing Systems*, 37:88091–88116.

Song Wang, Junhong Lin, Xiaojie Guo, Julian Shun, Jundong Li, and Yada Zhu. 2025a. Reasoning of large language models over knowledge graphs with super-relations. In *ICLR*.

Song Wang, Zhen Tan, Zihan Chen, Shuang Zhou, Tianlong Chen, and Jundong Li. 2025b. Anymac: Cascading flexible multi-agent collaboration via next-agent prediction. *arXiv preprint arXiv:2506.17784*.

Song Wang, Yaochen Zhu, Haochen Liu, Zaiyi Zheng, Chen Chen, and Jundong Li. 2024c. Knowledge editing for large language models: A survey. *ACM Computing Surveys*, 57(3):1–37.

Tianlu Wang, Ping Yu, Xiaoqing Ellen Tan, Sean O’Brien, Ramakanth Pasunuru, Jane Dwivedi-Yu, Olga Golovneva, Luke Zettlemoyer, Maryam Fazel-Zarandi, and Asli Celikyilmaz. 2023. Shepherd: A critic for language model generation. *arXiv preprint arXiv:2308.04592*.

Zheng Wang, Shu Xian Teo, Jieer Ouyang, Yongjun Xu, and Wei Shi. 2024d. M-rag: Reinforcing large language model performance through retrieval-augmented generation with multiple partitions. *arXiv preprint arXiv:2405.16420*.

Zilong Wang, Zifeng Wang, Long Le, Huaixiu Steven Zheng, Swaroop Mishra, Vincent Perot, Yuwei Zhang, Anush Mattapalli, Ankur Taly, Jingbo Shang, et al. 2024e. Speculative rag: Enhancing retrieval augmented generation through drafting. *arXiv preprint arXiv:2407.08223*.

Zhepei Wei, Wei-Lin Chen, and Yu Meng. 2024. Instructrag: Instructing retrieval-augmented generation with explicit denoising. *arXiv preprint arXiv:2406.13629*.

Kai Xiong, Xiao Ding, Yixin Cao, Ting Liu, and Bing Qin. 2023. Examining inter-consistency of large language models collaboration: An in-depth analysis via debate. *arXiv preprint arXiv:2305.11595*.

Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023. Recomp: Improving retrieval-augmented lms with compression and selective augmentation. *arXiv preprint arXiv:2310.04408*.

Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2024. Recomp: Improving retrieval-augmented lms with context compression and selective augmentation. In *The Twelfth International Conference on Learning Representations*.

Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. 2024. Making retrieval-augmented language models robust to irrelevant context. In *The Twelfth International Conference on Learning Representations*.

Wenhao Yu, Zhihan Zhang, Zhenwen Liang, Meng Jiang, and Ashish Sabharwal. 2023. Improving language models via plug-and-play retrieval feedback. *arXiv preprint arXiv:2305.14002*.

Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, et al. 2023. Siren’s song in the ai ocean: a survey on hallucination in large language models. *arXiv preprint arXiv:2309.01219*.

Siyun Zhao, Yuqing Yang, Zilong Wang, Zhiyuan He, Luna K Qiu, and Lili Qiu. 2024. Retrieval augmented generation (rag) and beyond: A comprehensive survey on how to make your llms use external data more wisely. *arXiv preprint arXiv:2409.14924*.

Xin Zheng, Jie Lou, Boxi Cao, Xueru Wen, Yuqiu Ji, Hongyu Lin, Yaojie Lu, Xianpei Han, Debing Zhang, and Le Sun. 2024. Critic-cot: Boosting the reasoning abilities of large language model via chain-of-thoughts critic. *arXiv preprint arXiv:2408.16326*.

A Implementaion Details

In this section, we provide more details of our implementation. Specifically, we set K , the number of clusters as 10, and the number of retrieved documents N as 50. Note that 50 is larger than the size of retrieved documents in most existing works, such as 5 and 10 in InstructRAG (Wei et al., 2024). We use vLLM (Kwon et al., 2023) to facilitate the inference of all models. We set the batch size as 200, using 4 A100 GPUs, each with 80GB of memory. By default, we set the maximum round of winnowing as 3, although the framework may terminate the winnowing process at earlier rounds. For all LLMs, we set the temperature as 0 to keep consistency across runs.

A.1 Datasets

In our experiments, we utilize public RAG benchmarks: NaturalQ (Kwiatkowski et al., 2019), TriviaQA (Joshi et al., 2017), PopQA (Mallen et al., 2023), ASQA (Stelmakh et al., 2022), and MHQA (Ho et al., 2020). Detailed statistics for the datasets are provided in Table 3. We utilize the Wikipedia corpus as the retrieval source and evaluate our approach using both sparse and dense pre-trained retrievers, such as BM25 (Robertson and Walker, 1994), DPR (Karpukhin et al., 2020), GTR (Ni et al., 2022), and Contriever (Izacard et al., 2021). Retrieval performance is assessed by Recall@5 and Recall@20, which checks if the top 5 or 20 retrieved documents include the correct answer. In line with established evaluation protocols (Asai et al., 2023b; Wei et al., 2024), we use Exact Match (EM) for ASQA (Stelmakh et al., 2022). For the other datasets, we consider accuracy, which measures whether the generated model outputs include the correct ground-truth answers (Mallen et al., 2023; Schick et al., 2024).

A.2 Baselines

In this subsection, we introduce the baseline used in our experiments for comparison. Specifically, we evaluate our approach against a variety of RAG baselines, considering settings with and without training. For baselines with training, we consider ① Supervised Fine-tuning (SFT), which optimizes the likelihood of generating the correct answer; ② RetRobust (Yoran et al., 2024), which fine-tunes the model by incorporating both relevant and irrelevant contexts to improve robustness; ③ Self-RAG (Asai et al., 2023b), which

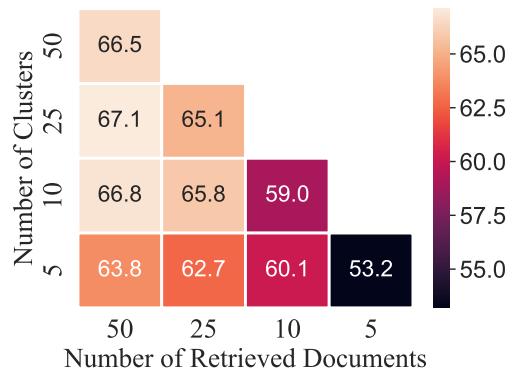


Figure 5: The results of WinnowRAG on dataset NaturalQ with varying numbers of query-aware clusters and retrieved documents.

adjusts retrieval using special reflection tokens; and ④ InstructRAG (Wei et al., 2024), which instructs the LM to provide rationales used for fine-tuning. Notably, for RetRobust and Self-RAG, we adopt their results with Llama-3-Instruct-8B as the backbone model, as reported in InstructRAG, instead of using Llama-2 in the original papers. For baselines without training, we consider ① In-context Retrieval-Augmented Language Modeling (RALM) (Ram et al., 2023), a prompting technique that enhances the non-retrieval baseline by providing the model with relevant documents; and ② In-context Learning (ICL), which uses ground-truth question-answer pairs from the training set as demonstrations, and ③ Zero-shot Prompting, which directly queries LLMs for the answer.

A.3 Retrieval Setup

Following Self-RAG (Asai et al., 2023b) and InstructRAG (Wei et al., 2024), we perform retrieval from documents in the Wikipedia dump in DPR (Karpukhin et al., 2020) for all datasets. Moreover, each document is a separate text extracted from Wikipedia articles, containing up to 100 words. Regarding the specific retrievers, we employ Contriever-MS MARCO for PopQA and TriviaQA and DPR for Natural Questions. For datasets ASQA and 2WikiMultiHopQA, we use GTR and BM25, respectively. By default, we retrieve the top 50 documents for all tasks. For the dense retrievers, we utilize their official weights. For the sparse retriever BM25, we implement it using Pyserini (Lin et al., 2021).

Table 3: Dataset statistics and the corresponding retrieval models.

Dataset	Train	Test	Retriever	Recall@5	Recall@20
Natural Questions	79,168	3,610	DPR	68.8	80.1
TriviaQA	78,785	11,313	Contriever	73.5	82.7
PopQA	12,868	1,399	Contriever	68.7	78.2
ASQA	4,353	948	GTR	82.2	87.5
MHQA	167,454	12,576	BM25	33.2	62.3

Table 4: Average latency (in seconds) per sample across different methods and datasets.

Method	PopQA	TriviaQA
In-Context RALM	1.66	2.44
Self-RAG	2.36	3.17
InstructRAG	2.92	3.85
WinnowRAG	3.55	4.18

B Additional Results

B.1 Latency Comparison with Baselines

We conducted latency evaluations for WinnowRAG and baseline methods. For a fair and realistic comparison, we randomly sampled 20 examples from each dataset and measured the average latency by processing each sample individually.

As shown in Table 4, WinnowRAG incurs a modest increase in latency due to its multi-stage process. However, this additional cost is justified by its substantial performance gains in retrieval-augmented generation. We will include this latency analysis in the revised manuscript to provide a more complete picture of the trade-off between efficiency and accuracy.

Table 5: Comparison with RECOMP-based document compression across datasets.

Method	PopQA	TriviaQA	NQ
ICL	63.1	74.2	60.1
ICL + RECOMP	61.5	73.4	59.5
InstructRAG-ICL	64.2	76.8	62.1
InstructRAG-ICL + RECOMP	63.3	75.1	60.4
WinnowRAG	68.1	79.3	66.8

B.2 Comparison with Document Compression Baselines

In this subsection, we include document compression baselines in our evaluation. We incorporate RECOMP (Xu et al., 2024), applying it to the retrieved documents across multiple RAG baselines.

As shown in Table 5, applying RECOMP results in slight performance degradation, likely due to information loss during document compression. In contrast, WinnowRAG consistently outperforms both the original and compressed baselines, demonstrating its effectiveness in selecting relevant information while preserving task-critical content.

Table 6: Performance comparison with document reranking baseline PE-Rank.

Method	PopQA	TriviaQA	NQ
ICL	63.1	74.2	60.1
InstructRAG-ICL	64.2	76.8	62.1
PE-Rank	63.9	75.5	61.4
WinnowRAG	68.1	79.3	66.8

B.3 Comparison with Document Reranking Baselines

We compare WinnowRAG with PE-Rank (Liu et al., 2025b), a single-agent LLM-based reranker that filters irrelevant documents before generation. As shown in Table 6, PE-Rank offers improvements over basic ICL, but falls short of WinnowRAG’s multi-agent iterative filtering.

These results underscore the advantage of our framework, especially in handling noisy or partially relevant retrieved documents. We will include this comparison and discussion in our updated manuscript to highlight the distinction between single-agent and multi-agent filtering approaches.

C Number of Query-Aware Clusters.

The number of query-aware clusters in Stage I, i.e., K , plays a significant role in the framework’s ability to cover diverse perspectives or sets of information from the retrieved documents, as each agent could provide a potentially unique answer based on its assigned cluster of documents. Since the result of varying K is tightly associated with the number of retrieved documents N , we hereby study the

joint impact of both K and N . Particularly, we conduct experiments by varying both of them on the dataset NatrualQ. It is noteworthy that $N \leq K$, otherwise the clustering becomes infeasible. From the results presented in Fig. 5. The key observations include: **① Fewer clusters lead to poor performance.** When the number of clusters (K) is too small, the framework's ability to cover diverse perspectives is significantly hindered. For example, the results with $K = 5$ are generally worse than the results with $k = 10$. Notably, with fewer clusters, each agent is forced to handle a broader range of documents, many of which may contain conflicting or irrelevant information. This reduces the precision of the generated answers, and thus the critic LLM struggles to resolve these conflicts, leading to suboptimal performance. This effect is particularly noticeable when the number of retrieved documents is large, as the few clusters cannot adequately filter and partition the information. **② Too many clusters can also be detrimental.** Conversely, increasing the number of clusters beyond a certain point also results in performance degradation. For example, when the number of retrieved documents is 25 or 50, enlarging the number of clusters K to 25 or 50 could impact the performance when compared to the results with $K = 10$. While more clusters allow agents to specialize in narrower sets of documents, excessive partitioning dilutes the amount of relevant information available to each agent, causing the loss of useful context. Additionally, when K is high, the critic LLM must process a larger number of agents, adding unnecessary complexity to the winnowing process without corresponding gains in accuracy. **③ More retrieved documents require more clusters.** As the number of retrieved documents increases, the optimal number of clusters also needs to increase. For example, the best performance with $N = 25$ and $N = 50$ is achieved when $K = 10$ and $K = 25$, respectively. This is because when more documents are retrieved, they are likely to contain a wider range of information, both relevant and irrelevant. If the number of clusters remains small while the number of retrieved documents increases, the framework becomes overwhelmed by noise, reducing the accuracy of the final answers. Nevertheless, when the number of clusters K is appropriately scaled with the number of retrieved documents, the agents can more effectively handle the information, leading to better overall performance.

D Prompt Templates

In this section, we provide the detailed prompts in our implementation.

D.1 Stage I Agent Response Generation

Stage I Agent Response Generation

Input: You are given the following documents.

Document [1] (Title: · · ·): {contents}

...

Based on the provided information, answer the following question: {question}. You are strictly prohibited from generating the answer based on your own knowledge.

Directly output your answer without any additional explanation.

Output: {answer}

D.2 Stage II Super-Agent Response Generation

Stage II Super-Agent Response Generation

Input: You are given the following documents.

Document [1] (Title: · · ·): {contents}

...

Based on the provided information, answer the following question: {question}. You are strictly prohibited from generating the answer based on your own knowledge.

Your response should consist of three components:

1. Extract a portion of the provided documents that directly supports your answer to the question. The extracted information should be concise and free from irrelevant details, serving as the evidence for your answer.
2. Explain how the evidence supports your final answer.
3. Present your final answer.

Format your response as follows:

Evidence: [YOUR EVIDENCE]

Explanation: [YOUR EXPLANATION]

Answer: [YOUR FINAL ANSWER]

Output: {response}

D.3 Stage I Critic LLM Agent Answer Summarization

Stage I Critic LLM Agent Answer Summarization

Input: You are given the following answers from $\{K\}$ agents to the question: {question}.

Answer [1]: Answer: {answer}

...

Your task is to summarize the $\{K\}$ answers and remove duplicates.

Your response should consist of two components:

1. Deduplicate the provided answers. Exact matching is not required; answers are considered duplicates if they have the same semantic meaning. Output a list of unique answers.
2. Explicitly indicate which answers are duplicates, along with their corresponding indices.

Format your response as follows:

Unique answers: [LIST OF UNIQUE ANSWERS]

Duplicate answers: [LIST OF DUPLICATE ANSWERS]

Output: {response}

D.4 Stage II Critic LLM Answer Judgement

Stage II Critic LLM Answer Judgement

Input: You are provided with the following responses from $\{K'\}$ agents to the question: {question}. Each response contains an answer, supporting evidence from the provided documents, and an explanation of how the answer was derived.

Response [1]: Answer: {answer}; Evidence: {evidence}; Explanation: {explanation}

...

Based on your knowledge and the provided information, you are tasked with the following:

1. Identify the misleading responses from the $\{K'\}$ that result in incorrect answers.
2. Determine whether a consistent answer can be derived from the remaining potentially correct responses.

Your response should consist of three components:

1. The list of responses with incorrect answers. Output a list of response IDs.
2. Provide an explanation for why these responses are considered incorrect, and why the remaining responses are considered correct.
3. Indicate yes or no, depending on whether a consistent answer can be derived from the remaining responses. If yes, also provide the consistent answer.

Format your response as follows:

Incorrect answers: [LIST OF INCORRECT RESPONSE IDS]

Explanation: [YOUR EXPLANATION]

Consistent answer: [YOUR ANSWER, IF APPLICABLE]

Output: {response}